



Our collections

Discover beautiful floors
for demanding spaces

At Designflooring we see flooring differently...

We travel the world in our quest to bring you exceptional floors that inspire and delight. We look to the textures, shapes and formations of the natural world to influence our unique floor designs. By combining these original features with cutting-edge design, we create simply beautiful floors that bring your vision to life.



Contents

Why Designflooring?	2
A partner you can trust	5
Quality and service	7
The environment	8
All the benefits of Designflooring	10
Formats	14
Introducing our collections	16
Introducing bespoke design.....	19
Wood at a glance	24
Stone at a glance	26
Designflooring in commercial environments	31
Sector applications	32
Sector in focus: Hospitality and leisure	34
Sector in focus: Retail	38
Sector in focus: Work place	43
Gluedown wood:	46
Rubens	48
Opus	34
Van Gogh	56
Gluedown stone:	61
Rubens	62
Opus	66
Van Gogh	68
Gluedown abstract:	72
Kaleidoscope	74
Heritage Collection	78
Opus Abstract	82
Loose lay wood:	88
Designflooring LooseLay	88
Loose lay stone:	93
Designflooring LooseLay	94
Rigid core wood:	96
Rubens	98
Van Gogh	102
Rigid core stone:	107
Rubens	108
Van Gogh	112
Resources:	118
Digital tool suite	120
Sample service	124
Cleaning and maintenance	124
Get in touch	125
Product overview:	127
Products by range wood	128
Products by range stone	131
Solid colours	133

A partner you can trust

Founded in 2004, Designflooring has grown to be one of the leading vinyl flooring companies in Europe.

Still family owned, we remain true to our roots in being fiercely committed to our customers. Since our beginnings, we have developed our technology, extended our design portfolio and expanded the team.

Our goal remains the same: to create exceptional floors that capture every intricate detail of wood and stone to the highest level of quality that is both practical and beautiful.



■ Grey Brushed Oak CM-VGW120T



Quality and service

Our distribution centre in Homburg, Germany, provides access to in excess of 200,000m² of our Designflooring products. We pride ourselves on our 99.9% stock holding capability to ensure the product you order is delivered in full and on time.

All of our products are manufactured to ISO 9001. Our robust quality control systems ensure that our products reach their final destination in top condition. In addition, our experienced technical service team are on hand to support you through the specification, installation and maintenance of your chosen design.

To help you get started we offer a sample service for full size planks and tiles, together with supporting marketing collateral on your chosen format or by sector.

For more information on how to order a full sized sample, contact your local representative or call our customer service team on:

+44 1386 820105

sales@designflooring.com



The environment

Designflooring continually looks to improve our manufacturing process and logistics to ensure sustainability and best value for our customers. This is further extended to the global supply and maintenance of our products.

Sustainable raw materials

The PVC in our products is derived from a truly sustainable resource: salt. We source from ISO 14001/ISO 9001 certified raw material suppliers where possible.

Safe products

All our products are free from:

- Heavy metals and comply with 'REACH' (Registration, Evaluation, Authorisation and Restriction of Chemicals)
- 'BPA' (bisphenol A) and formaldehyde Phthalates, Reprotoxics, endocrine disruptors and carcinogens.

Air quality

Our products have been tested for contribution to indoor air quality. Our products meet the strictest standards and are very low emitting of VOCs (volatile organic compounds).

Proven low impact

Many of our products have an Environmental Product Declaration (EPD). Based on life cycle assessment (LCA), this evaluates a product's environmental impact based on the following potential factors:

- Global warming
- Ozone depletion
- Fossil fuel depletion.


Our products have also been rated in the BRE Green Guide of A/A+ for use in health, education, commercial, retail and domestic sectors.



Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)




CERTIFIED BY SCS Global Services

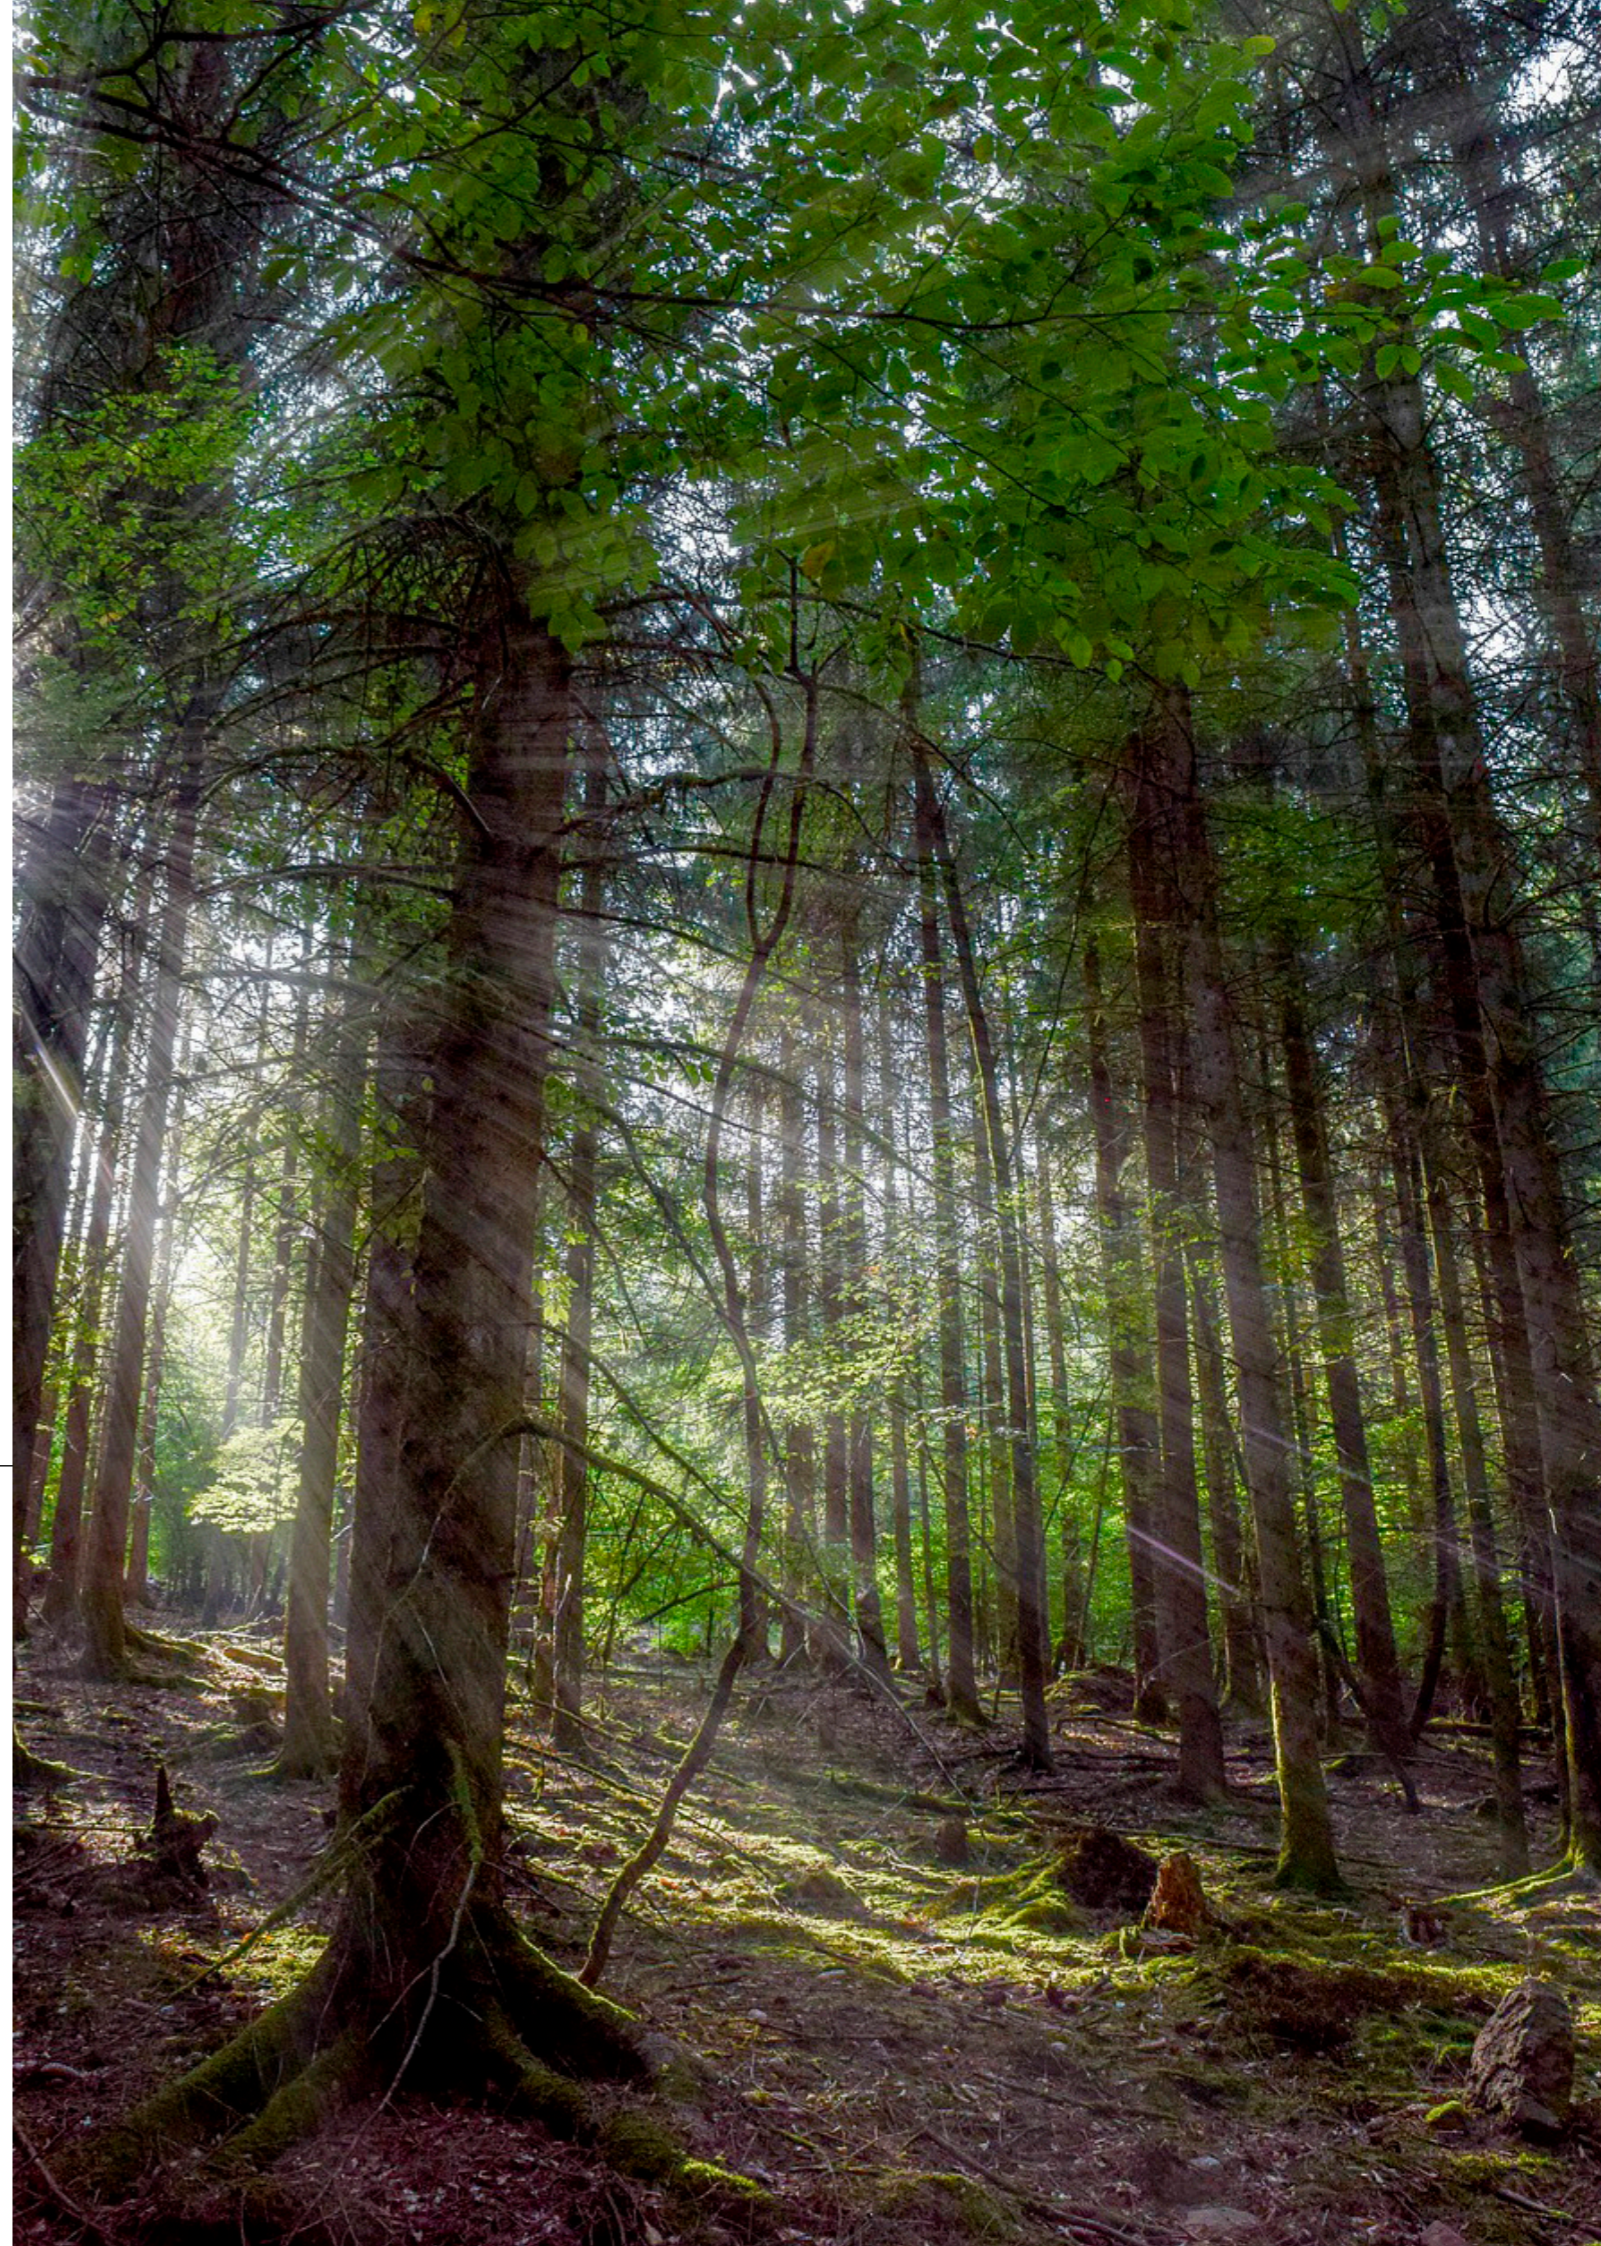

All the benefits of Designflooring

From large commercial environments to small residential rooms, at Designflooring, our vast range of products offer the essential benefits that make our luxury vinyl flooring the perfect choice for any flooring space.

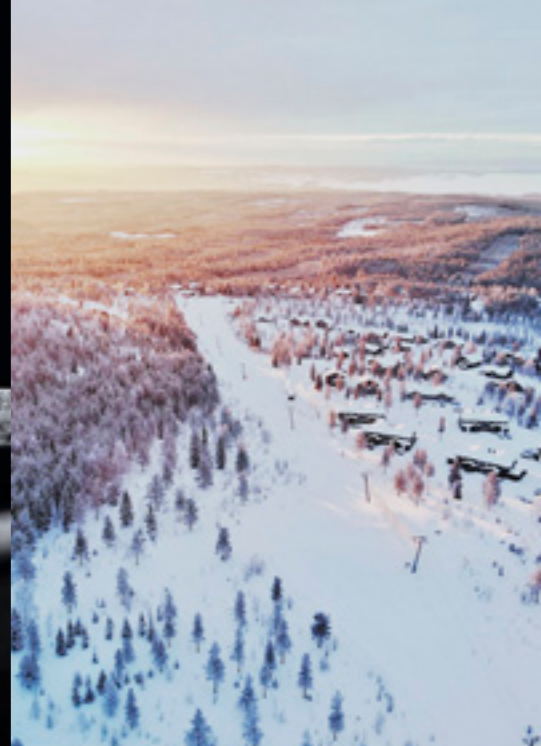

Acoustic qualities

Designflooring is quieter underfoot compared to most hard flooring alternatives. Our rigid core and loose lay collections come with a backing that reduces noise transfer to rooms below, making it ideal for apartment blocks and any upstairs rooms.



Low maintenance

The commercial cleaning and maintenance regime is simple and can be carried out by hand or using a mechanical cleaning apparatus. With Designflooring, you don't have to worry about any sanding, refinishing, staining or varnishing either.



K-Guard+®

We use K-Guard+® surface technology for scuff and stain resistance ensuring there is no need to apply an additional surface treatment following installation.



100% recyclable

We do everything we can to meet and exceed legislative and environmental guidelines in all regions. All Designflooring floors are 100% recyclable and are environmentally friendly.



Guarantee

All Designflooring floors come with a commercial guarantee of 10-17 years, depending on the product range specified.



Durable

Unlike other flooring alternatives, Designflooring gives you the look and feel of natural products but with the durability and resilience of luxury vinyl.



Realistic designs

Inspired by nature, our products are designed in-house and realistically replicate the look and feel of wood and stone materials.



Compatible with underfloor heating

For added warmth, our flooring is perfectly suitable for underfloor heating systems up to 27°C.



Waterproof

Unlike laminate and engineered hardwoods, our floors are impervious to water and will not swell, crack or warp when wet, making them perfect for kitchens, office tea points and washrooms.



Slip resistance

Slip resistant flooring helps to prevent accidents caused by trips, slips and falls in busy environments. Our products have a slip rating of R10.



Hygienic

Our floors don't hold dust, dirt, pollen or other allergens. Our cleaning products also kill 99.9% of germs.




Formats

Three formats to suit your projects needs.

Gluedown

Our gluedown ranges offer our widest choice of colours and formats. Features such as textured emboss or our premium handscraped finish, wide bevels or flat edges make each range unique to Designflooring.

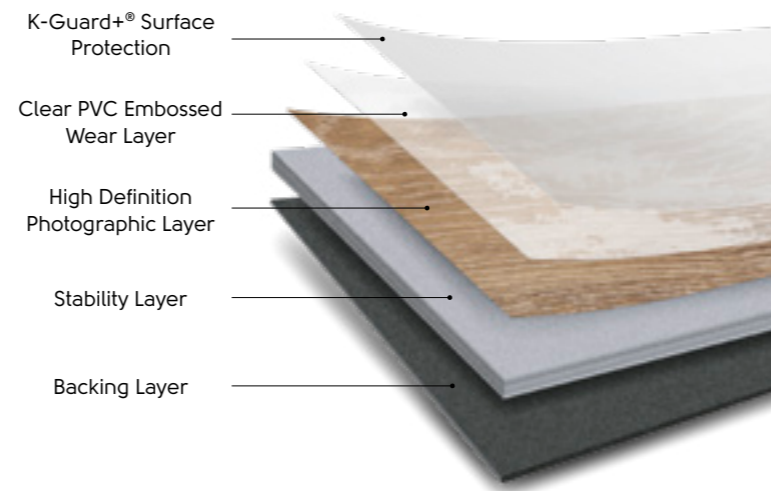

Gluedown benefits



Range of price points to suit different budgets.



No expansion gap required.



Bespoke design possibilities.



Available in a wide range of designs, colours, textures and sizes.




Bring your vision to life.

Loose lay

Loose lay features our K-Wave® friction grip backing which helps hold the product to the subfloor without adhesive, making it quick and easy to install.

Ideal for underfloor access panels and temporary roomsets, each plank can be lifted individually where required.

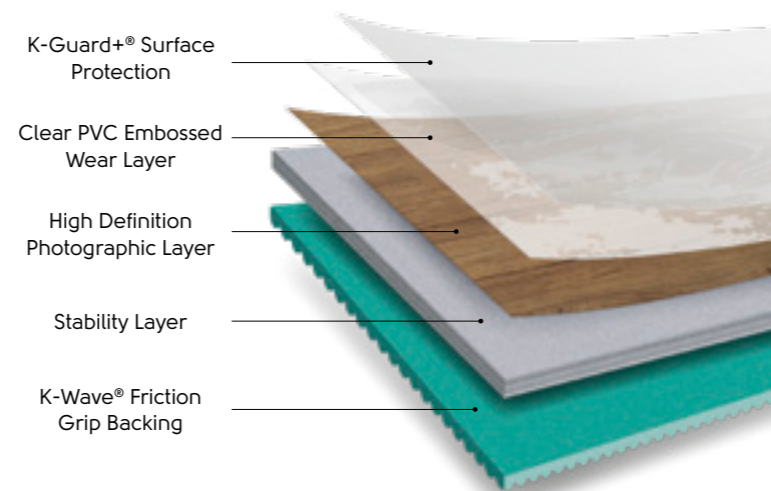

Loose lay benefits



Quick and easy to install.



Reduces noise transfer by 13dB.



No expansion gap required.



Easy access to underfloor panels.




Suitable for subfloors with elevated moisture found in some new builds and extensions.



Minimises disruption by installing over most hard subfloors.

Rigid core

Our rigid core ranges are ideal for installations where acoustics, uneven subfloors or preservation of existing hard floors need to be considered. A click-locking mechanism allows for quick installation and the pre-attached backing eliminates the need for a separate underlayment.

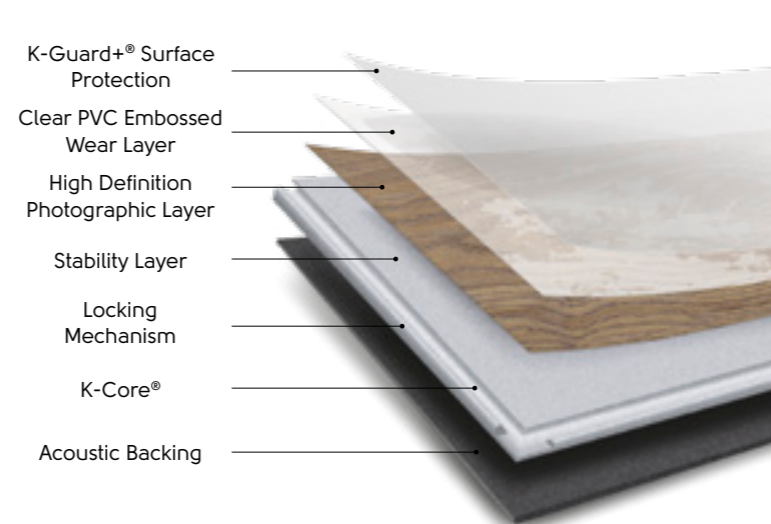

Rigid core benefits



Quick and easy to install.



Hides subfloor imperfections.



2G™ and 5G® click-locking systems.



Suitable for subfloors with elevated moisture found in some new builds and extensions.



Reduces noise transfer to rooms below by up to 21dB.



Enables preservation of existing floor.

Introducing our collections

Range	Bevelled Edge	Plank Size (mm)	Tile Size (mm)	Thickness (mm)	Wear Layer (mm)	ISO 10874 Classification					
						Domestic Use	Domestic Guarantee ^{^*}	Commercial Use	Commercial Guarantee [^]	Light Industrial Use	Light Industrial Guarantee ^{^*}
Gluedown											
Rubens	No	1219,2 x 177,8 1219,2 x 228,6	304,8 x 457,2	2	0,3	23	30 years	31	10 years [±]	–	–
Opus	Micro	1219,2 x 228,6	457,2 x 609,6	2,5	0,55	23	30 years	33	15 years	42	15 years
Van Gogh	Micro	1219,2 x 177,8 1422,4 x 228,6 711,2 x 177,8 600,0 x 120,0	457,2 x 609,6 177,8 x 711,2	3	0,55	23	30 years	33	15 years	42	15 years
Heritage Collection	Standard	Various	Various	2,5	0,55	23	30 years	33	15 years [±]	42	15 years
Kaleidoscope	With over 100 different colours to choose from, the precise technical specification for your Kaleidoscope product will depend on your final selection. Please contact your business manager for further details.										
Rigid core											
Van Gogh	Micro	1220,0 x 180,0		5,5	0,55	23	30 years	33	15 years	42	–
		708,0 x 177,0 1420,0 x 225,0	177,0 x 708,0 457,0 x 935,0 457,0 x 600,0	6,5							
Rubens	No	1220,0 x 180,0	304,8 x 457,2	4,5	0,3	23	30 years	31	10 years	–	–
Loose lay											
Designflooring LooseLay	No	1050,0 x 250,0 1500,0 x 250,0	500,0 x 610,0	4,5	0,55	23	30 years	33	15 years	42	15 years

* Guarantees apply when used at EN 685 classification stated.

± Commercial Light Duty use only.

^ Subject to terms. Please see our website.

Class Examples of areas of use

23 Living rooms, entrance halls, dining rooms, bedrooms and corridors
31 Hotel bedrooms, conference rooms, small offices
32 Classrooms, small offices, hotels, boutiques
33 Corridors, department stores, lobbies, schools, open plan offices

34 multi-purpose halls, counter halls, department stores
41 electronic assembly, precision engineering
42 storage rooms, electronic assembly
43 storage rooms, production halls



■ Dolce SP119 | Salute Blanco SP122 | Amber SP721



■ Salute Blanco SP122 | Burnt Sienna SP719 | Chalk Grey SP724

Introducing bespoke design

Flexible and versatile, our flooring will complement and enhance your interior design, helping you to create inspirational spaces that will 'wow', intrigue and inspire social sharing.

Complementary or contrasting designs can effortlessly create a unique interior. Our Kaleidoscope collection of geometric shapes create eye-catching patterns. A subtle yet sophisticated effect can be created with a combination of complementary wood shades in hexagon tiles. Alternatively, an impactful 3D pattern can be achieved with a combination of dark and light shades.

With Designflooring there are no limits.



□ Kaleidoscope Hexa: KAL09



■ Pale Limed Oak KP94-7 | White Painted Oak KPI05-7



□ Kaleidoscope Cubix: Luna SP111 | Ombra SP114 | Urbus SP213



■ Clifton CLIF-01



■ Clifton CLIF-04



■ Lansdown LANS-04




■ Mayfair MAYF-01

Wood at a glance


Gluedown: ■ Rubens | ■ Opus | ■ Van Gogh

Loose lay / rigid core: ■ Designflooding LooseLay | ■ Rubens | ■ Van Gogh

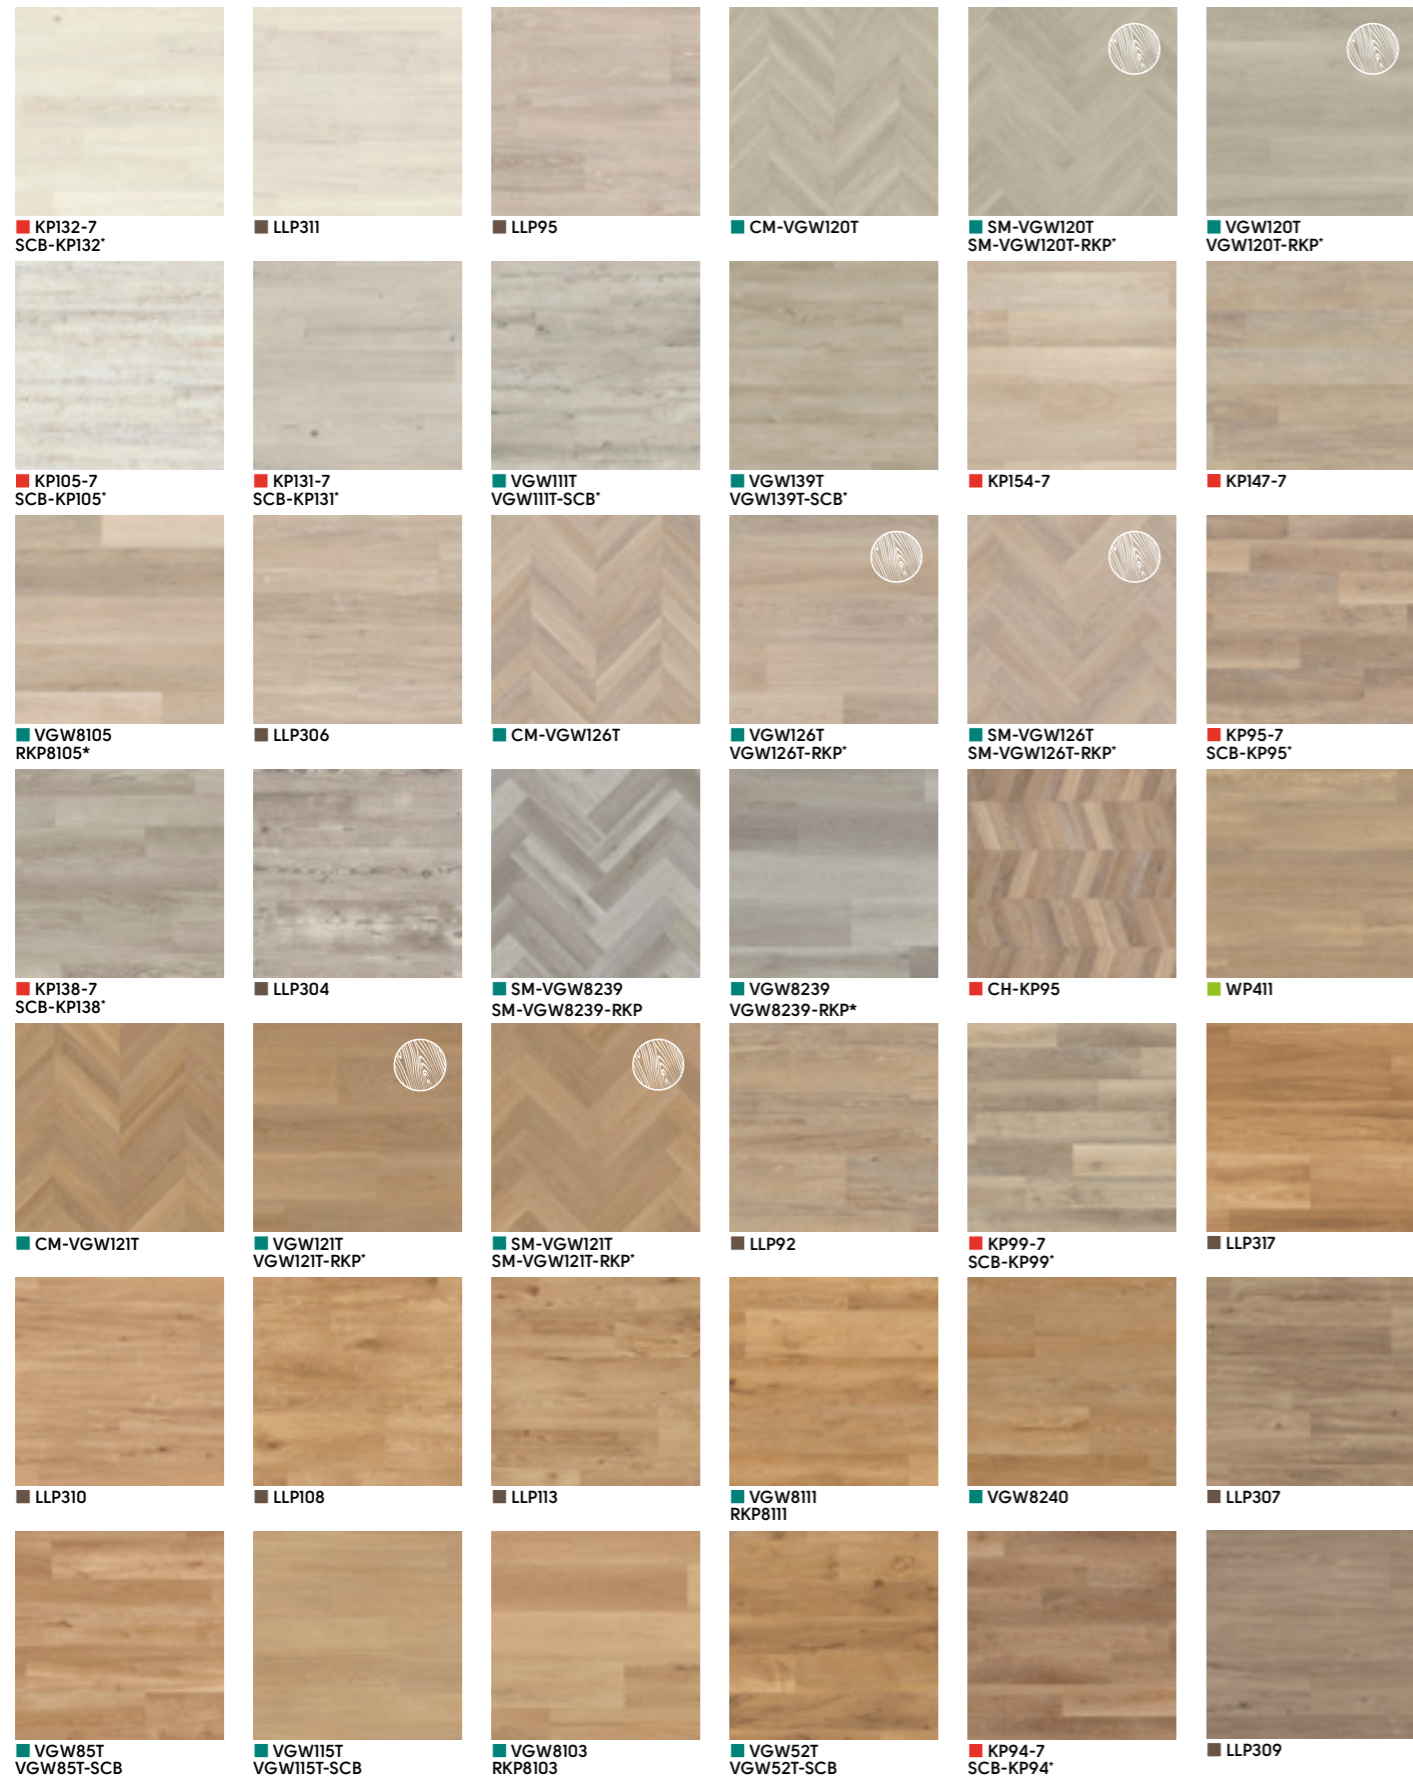

Natural Wood Grain Emboss

A selection of our Van Gogh designs have been finished with a handcrafted emboss to ensure that each plank is inherently unique and thereby accentuating the natural aesthetics of the wood. Look out for our natural wood grain icon to see which of our designs benefit from this natural finish.

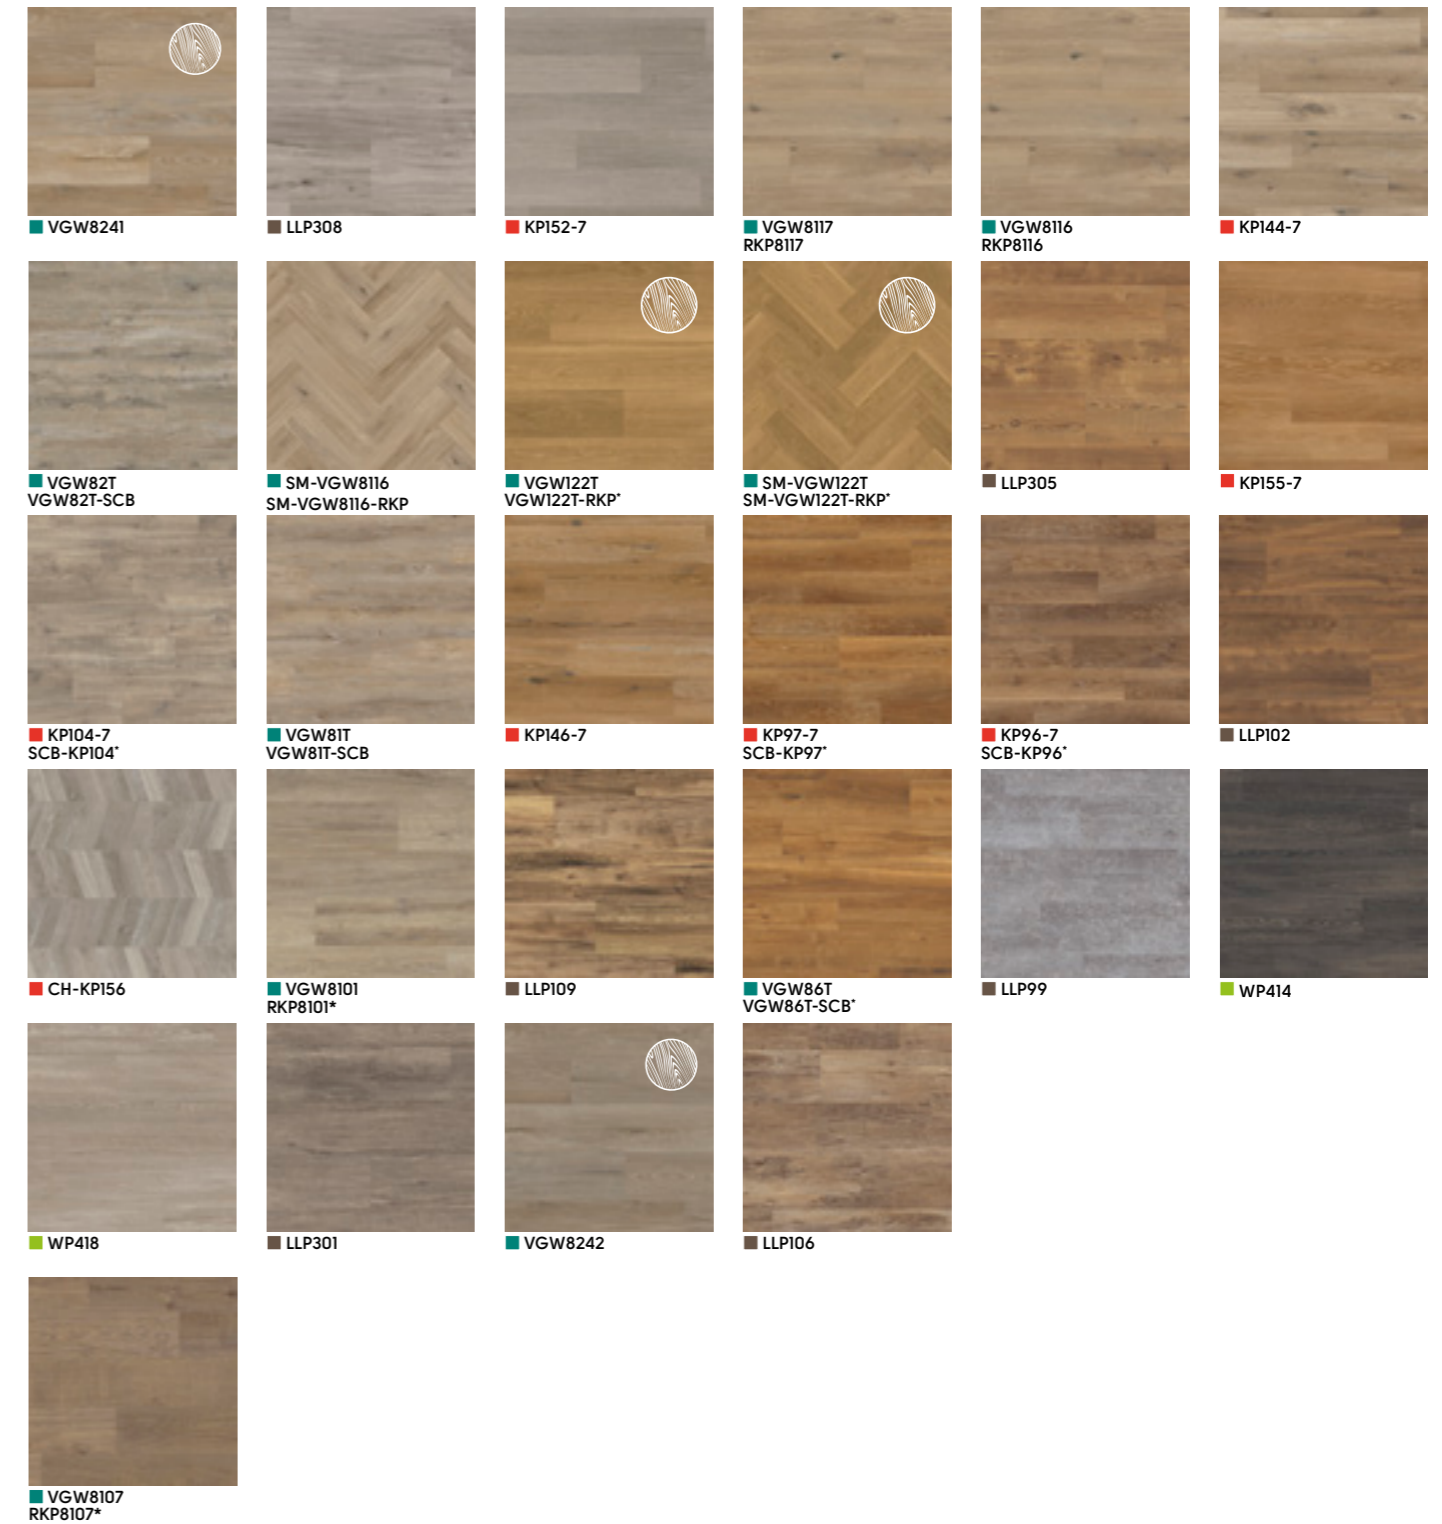


* This product is available in a gluedown and a rigid core format.


Stone at a glance

Gluedown: ■ Rubens | ■ Opus

Loose lay / rigid core: ■ Designflooring LooseLay | ■ Rubens | ■ Van Gogh

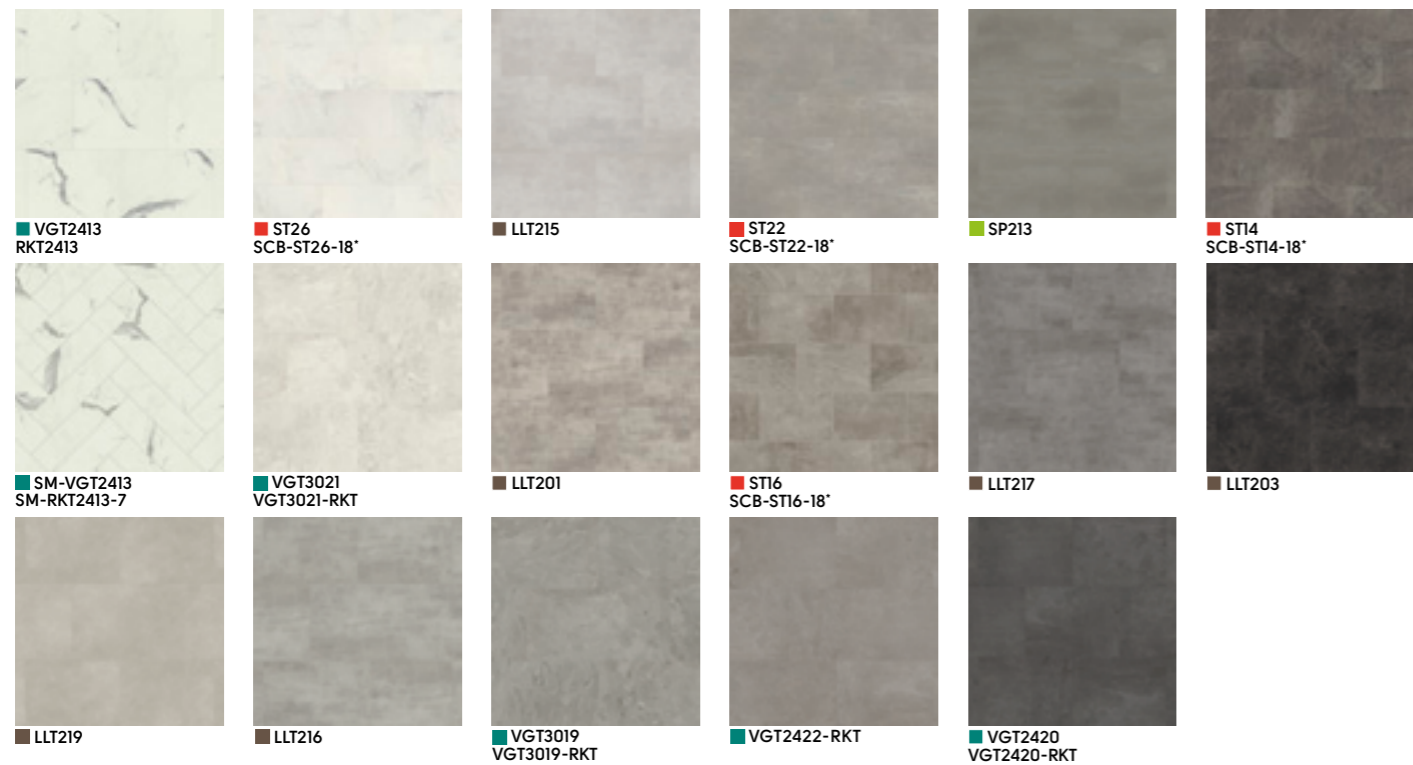

* This product is available in a gluedown and a rigid core format.

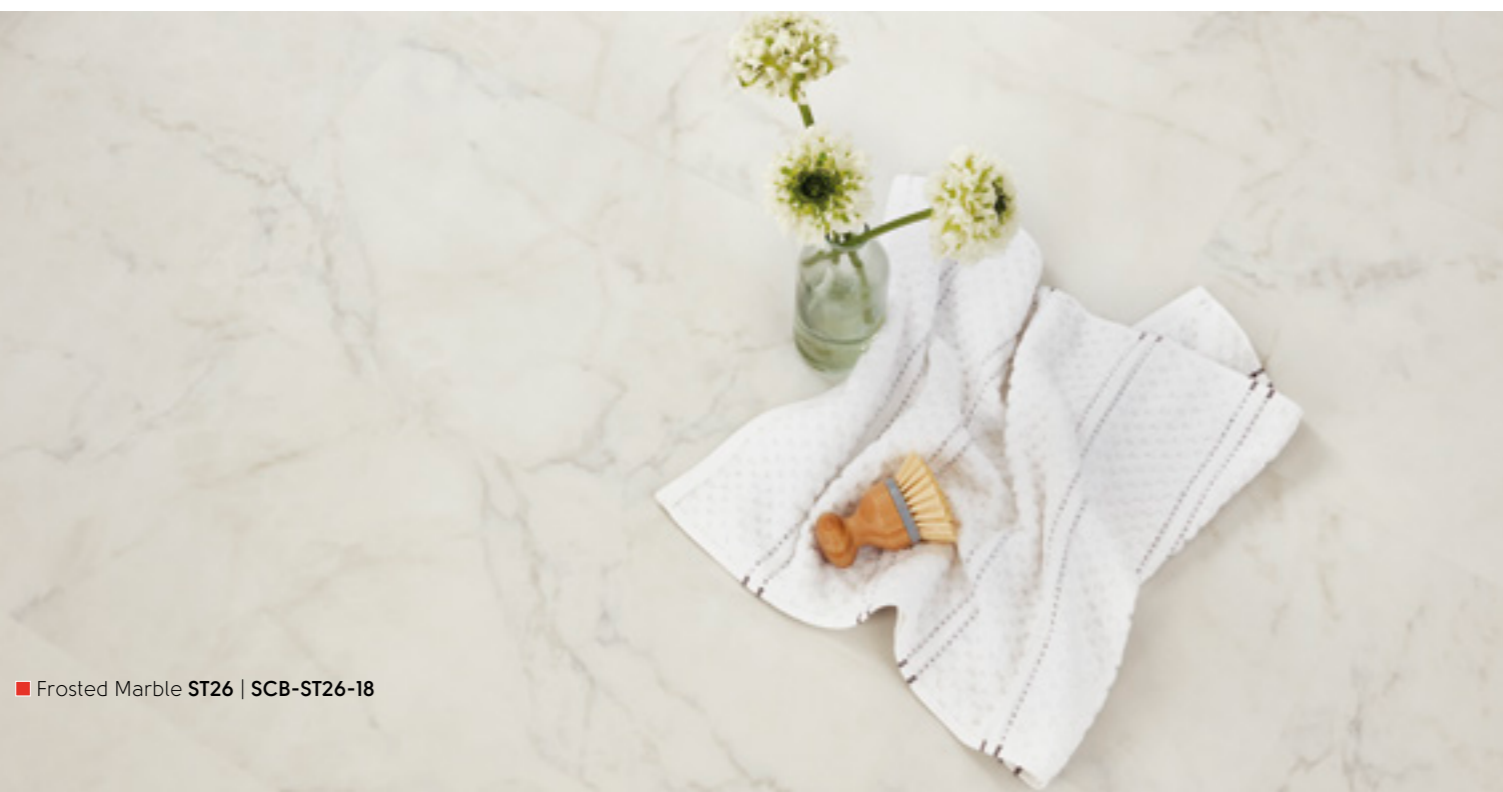

■ Frosted Marble ST26 | SCB-ST26-18




■ Milanese Slate VGT2420 | VGT2420-RKT

Abstract at a glance

Gluedown: ■ Heritage Collection | ■ Kaleidoscope | ■ Opus



Solid Colours

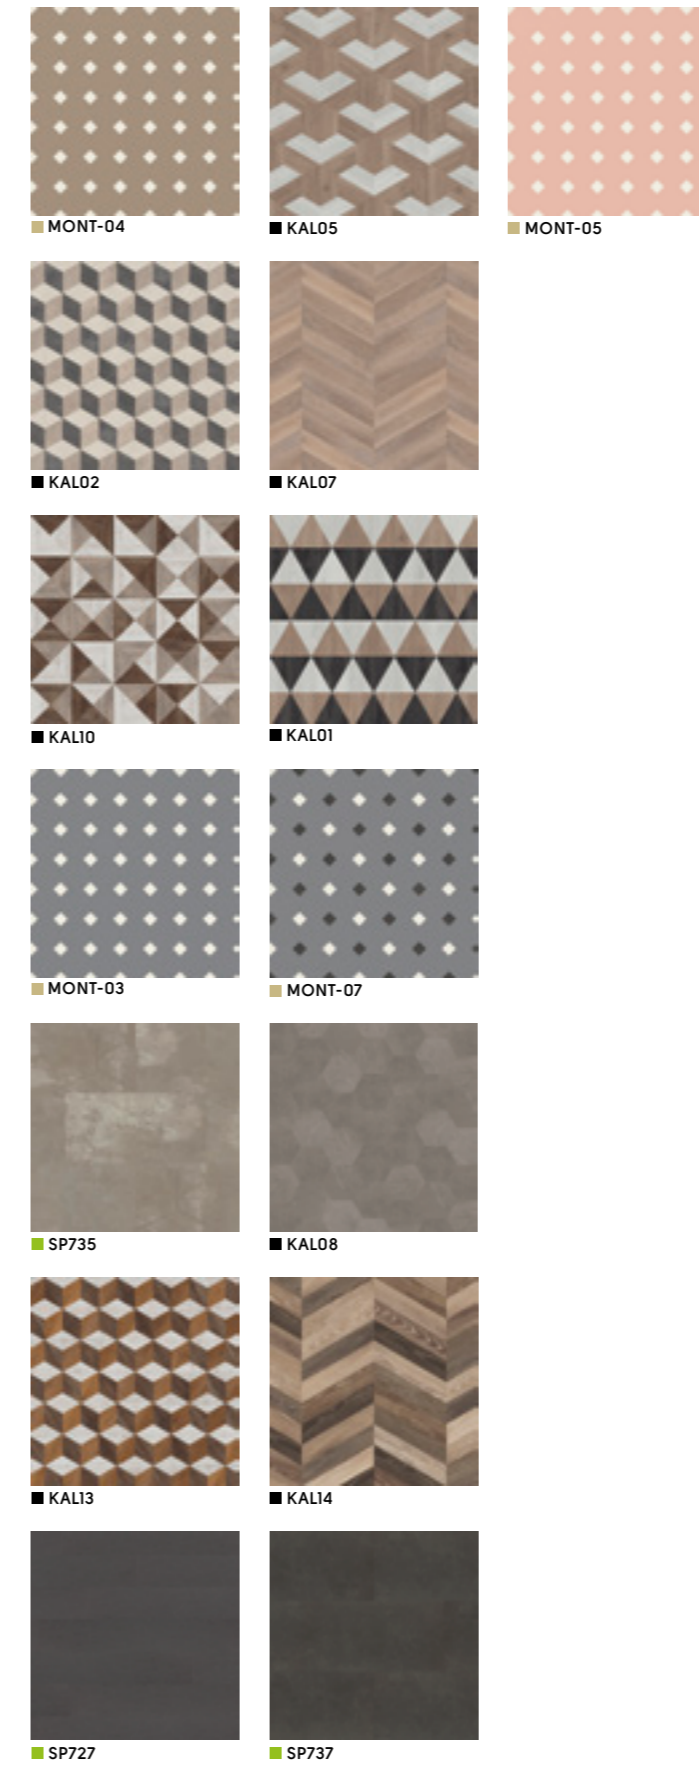



■ Chalk Grey SP725 | Yellow Ochre SP726 | San Marco SP729 | Argen WP414

Zoning



■ Palazzo Marble SM-VGT2413 | Canadian Urban Oak SM-VGW8116

Blending

Designflooring in commercial environments

Zoning

Wayfinding

Blending

Wayfinding



■ Burnt Sienna SP719 | Indigo SP720 | Chalk Grey SP724 | Yellow Ochre SP726 | Umbra SP732

Sector applications

- Retail
- Education
- Hospitality and leisure
- Office
- Housebuild & co-living

Retail



■ Croftmore Oak VGW8240

Education




□ Capri LLT209

Office



■ Smoked Concrete SCB-ST22-18

Hospitality and leisure

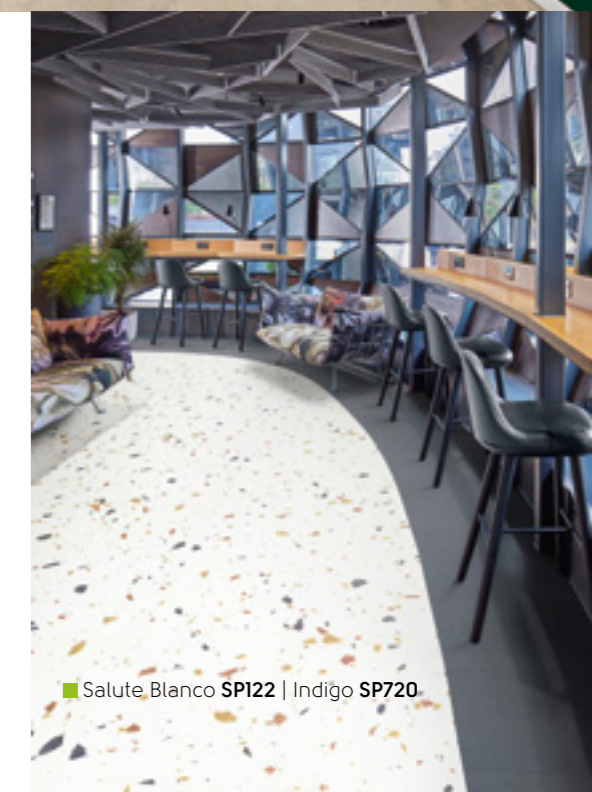

■ Salute Blanco SP122 | Indigo SP720



Where style combined with resilience and longevity is vital, Designflooring is a proven choice for the demands of hotels, bars, restaurants, tourist attractions and leisure facilities.

Sector in Focus:

Hospitality and leisure

Hotel Edgar, Saint Brieuç, Brittany.
Golden Brushed Oak
SM-VGW122T-RKP



ió
Contemporary
Wellness
Centre,
Marseille

Create a calm atmosphere with warm tones combined with natural oak grains for an attractive and modern finish.



“

With more than 200 visitors per week, we needed the realistic look of natural wood, but with the practical advantages of a LVT flooring.

Mrs. Bénédicte Morel,
owner of ió Contemporary
Wellness Centre

”

Sector in focus:

Retail

A Designflooring floor offers a hard wearing and practical choice for high footfall stores. We understand the importance of minimising the disruption of a refurbishment to busy retail environments, which is why our floors are simple and convenient to fit. Our innovative LooseLay and rigid core products can be fitted over existing hard floors, reducing business downtime.



Utah LLT216



Honey Limed Oak KP155-7



Country Oak VGW81T

Mix it up...

...in open plan spaces, a mix and match combination of planks can create an eye-catching floor and identity.



Sector in focus:

Work place

A great first impression for any business looking to bring customers to their premises is important to uphold brand reputation, win or retain customers.

The high acoustic absorbency of our rigid core and loose lay ranges contribute to a calm and productive working environment. Both quick to install means there is little downtime for businesses during installation.



□ Vermont LLT217 | Alaska LLT215



■ Warm Brushed Oak VGW121T | VGW121T-RKP

Schindler, France

Make a great first impression with Designflooring LooseLay when welcoming visitors and customers to new premises.

□ Antique Timber LLP106



“

Designflooring has a strong reputation in Europe for supplying a wide range of luxury vinyl flooring in various applications.

Mr Cédric Bordet, CEO of Soft Building Patrimony

”

Rubens Wood



1219,2mm x 177,8mm

Dutch Limed Oak **KP154-7**Washed Scandi Pine **KP132-7**Pale Limed Oak **KP94-7**White Painted Oak **KP105-7**Rose Washed Oak **KP95-7**Grey Scandi Pine **KP131-7**Honey Limed Oak **KP155-7**Coastline Oak **KP147-7**Washed Character Oak **KP144-7**Grey Studio Oak **KP152-7**Traditional Character Oak **KP146-7**Grey Limed Oak **KP138-7**Classic Limed Oak **KP97-7**Lime Washed Oak **KP99-7**Mid Limed Oak **KP96-7**Light Worn Oak **KP104-7**

1219,2mm x 228,6mm

Rose Washed Oak **CH-KP95**Grey Washed Oak **CH-KP156**

This product is also available in a rigid core format.

	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	EN ISO 24346	2,0 mm
Wear layer	EN ISO 24340	0,3 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	n/a 10 years 30 years
Bevelled edge		No
Mass unit per area	EN ISO 23997	3605 g/m ²
Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	n/a 31: Commercial moderate 23: Domestic heavy
Reaction to fire	EN 13501-1	Bfl-s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN 660-2 EN ISO 10582	Group T Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN 434 / EN ISO 23999	Pass (≤0,25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 1 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN 433 / EN ISO 24343-1	Pass (≤0,1 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass
Thermal resistance	ISO 8302	0,0084 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	DIN 51130 EN 13893	R10 DS
Environmental	French VOC regulation (ISO 1600) Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 DIBt/AgBB ISO 14001 / ISO 9001	A+ Gold certification; Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. Pass Manufactured to quality and environment management systems standards
Adhesive	Universal Acrylic Epoxy High Temperature Pressure Sensitive	Yes Yes Yes Yes Yes
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



■ Grey Scandi Pine KP131-7




1219,2mm x 228,6mm



Pallida WP418



Niveus WP411

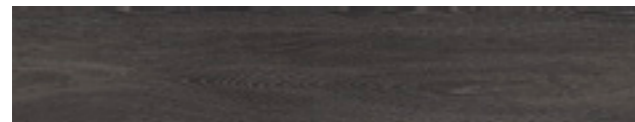

Argen WP414



	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	EN ISO 24346	2,5 mm
Wear layer	EN ISO 24340	0,55 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	15 years 15 years 30 years
Bevelled edge		Micro
Mass unit per area	EN ISO 23997	4398 g/m ²
Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN 649 EN ISO 10582	Group T Type 1
Flexibility	EN 434/EN ISO 23999	Pass
Dimensional stability	EN 434 / EN ISO 23999	Pass (≤0,25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN ISO 24343-1	Pass (≤0,1 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass
Thermal resistance	ISO 8302	0,0097 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	DIN 51130 EN 13893	R10 DS
Environmental	French VOC regulation (ISO 1600) Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 DIBt/AgBB ISO 14001 / ISO 9001	A+ Gold certification; Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. Pass Manufactured to quality and environment management systems standards
Adhesive		Please refer to our recommended adhesive list
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.


** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Opus

GLUEDOWN

■ Argen WP414

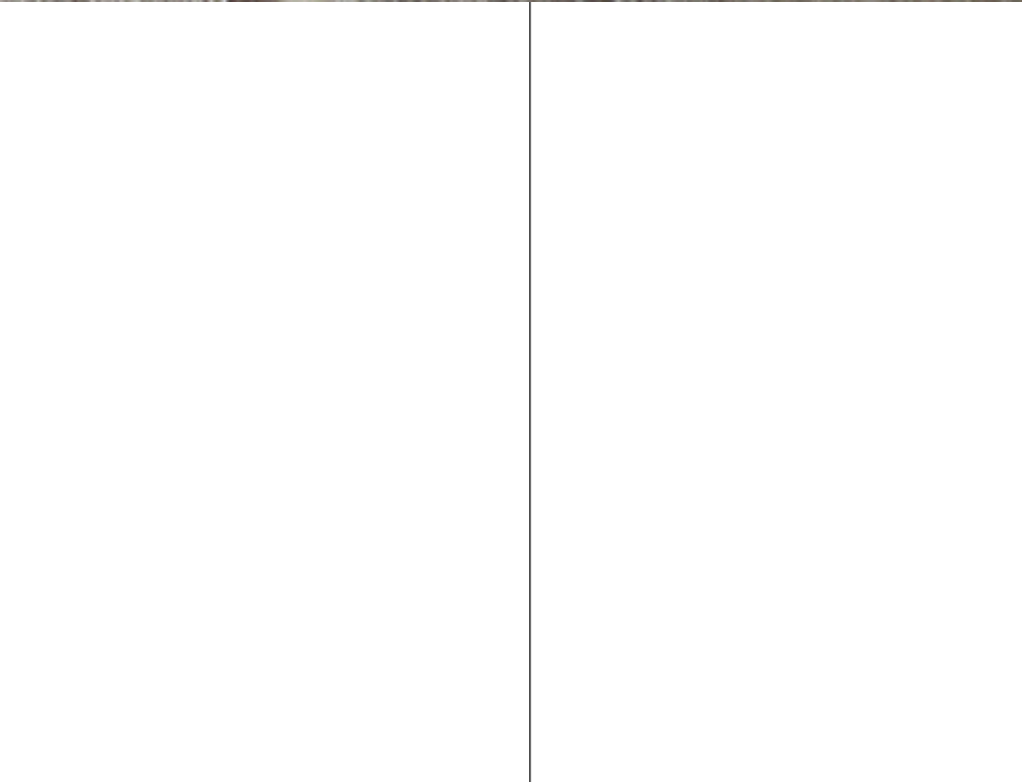

Van Gogh Wood



Natural Wood Grain Emboss

A selection of our Van Gogh designs have been finished with a handcrafted emboss to ensure that each plank is inherently unique and thereby accentuating the natural aesthetics of the wood. Look out for our natural wood grain icon to see which of our designs benefit from this natural finish.

711,2mm x 177,8mm



Neutral Brushed Oak **SM-VGW126T**



Warm Brushed Oak **SM-VGW121T**



Grey Brushed Oak **SM-VGW120T**



Canadian Urban Oak **SM-VGW8116**



Golden Brushed Oak **SM-VGW122T**



Texas Grey Ash **SM-VGW8239**

1219,2mm x 177,8mm



Natural Prime Oak **VGW115T**



Light Country Oak **VGW139T**



French Oak **VGW85T**



Light Distressed Oak **VGW111T**




Auckland Oak **VGW52T**



Country Oak **VGW81T**



Classic Oak **VGW86T**



Distressed Oak **VGW82T**

1420,0mm x 225,0mm



Texas White Ash **VGW8105**



Texas Grey Ash **VGW8239**



Warm Ash **VGW8103**




Baltic Washed Oak **VGW8101**




Canadian Nude Oak **VGW8117**




Hayfield Oak **VGW8241**




Baltic Limed Oak **VGW8111**




Aviemore Oak **VGW8242**



Canadian Urban Oak **VGW8116**



Smoked Butternut **VGW8107**



Croftmore Oak **VGW8240**


1422,4mm x 228,6mm




Warm Brushed Oak **VGW121T**



Neutral Brushed Oak **VGW126T**



Golden Brushed Oak **VGW122T**



Grey Brushed Oak **VGW120T**

600,0mm x 120,0mm



Neutral Brushed Oak **CM-VGW126T**



Warm Brushed Oak **CM-VGW121T**



Grey Brushed Oak **CM-VGW120T**



This product is also available in a rigid core format.



	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	EN ISO 24346	3,0 mm
Wear layer	EN ISO 24340	0,55 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	15 years 15 years 30 years
Bevelled edge		Micro
Mass unit per area	EN ISO 23997	5187 g/m ²
Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥7)
Abrasion resistance	EN 649 EN ISO 10582	Group T Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN 434 / EN ISO 23999	Pass (≤0,25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 4 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN 433 / EN ISO 24343-1	Pass (≤0,1 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass
Thermal resistance	ISO 8302	0,0118 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	DIN 51130 EN 13893	R10 DS
Environmental	French VOC regulation (ISO 1600) Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration DIBt/AgBB ISO 14001 / ISO 9001	A+ Gold certification; Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Pass Manufactured to quality and environment management systems standards
Adhesive		Please refer to our recommended adhesive list
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



■ Warm Brushed Oak VGW121T








Gluedown Stone

Rubens Stone

304,8mm x 457,2mm

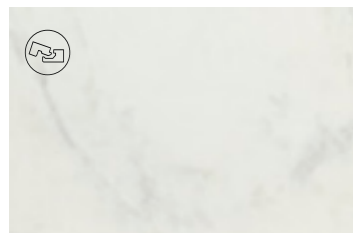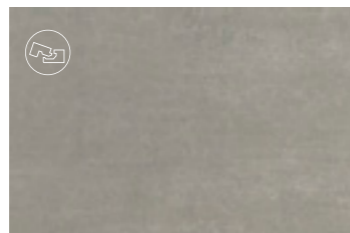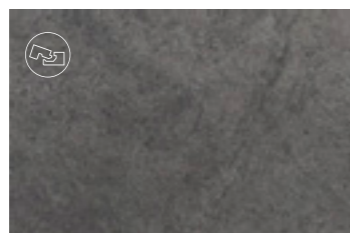Frosted Marble **ST26**Smoked Concrete **ST22**Grey Riven Slate **ST16**Cumbrian Stone **ST14**

	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	EN ISO 24346	2,0 mm
Wear layer	EN ISO 24340	0,3 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	n/a 10 years 30 years
Bevelled edge		No
Mass unit per area	EN ISO 23997	3605 g/m ²
Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	n/a 31: Commercial moderate 23: Domestic heavy
Reaction to fire	EN 13501-1	Bfl-s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN 649 EN ISO 10582	Group T Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN 434 / EN ISO 23999	Pass (≤0,25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 1 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN 433 / EN ISO 24343-1	Pass (≤0,1 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass
Thermal resistance	ISO 8302	0,0084 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	DIN 51130 EN 13893	R10 DS
	French VOC regulation (ISO 1600)	A+
	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions.
Environmental	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	DIBt/AgBB	Pass
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standards
Adhesive	Universal Acrylic Epoxy High Temperature Pressure Sensitive	Yes Yes Yes Yes Yes
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



This product is also available in a rigid core format.




■ Grey Riven Slate ST16



Opus Stone

457,2mm x 609,6mm



Urbus SP213



Urbus SP213



	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	EN ISO 24346	2,5 mm
Wear layer	EN ISO 24340	0,55 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	15 years 15 years 30 years
Bevelled edge		Micro
Mass unit per area	EN ISO 23997	4398 g/m ²
Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN 649 EN ISO 10582	Group T Type I
Flexibility	EN 434/EN ISO 23999	Pass
Dimensional stability	EN 434 / EN ISO 23999	Pass (≤0,25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN ISO 24343-1	Pass (≤0,1 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass
Thermal resistance	ISO 8302	0,0097 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	DIN 51130 EN 13893	R10 DS
Environmental	French VOC regulation (ISO 1600) Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 DIBt/AgBB ISO 14001 / ISO 9001	A+ Gold certification; Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. Pass Manufactured to quality and environment management systems standards
Adhesive		Please refer to our recommended adhesive list
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Van Gogh Stone



457,2mm x 609,6mm

Palazzo Marble **VGT2413**Roman Slate **VGT2422**Milanese Slate **VGT2420**

457,2mm x 914,4mm

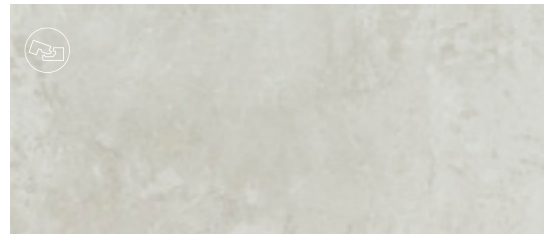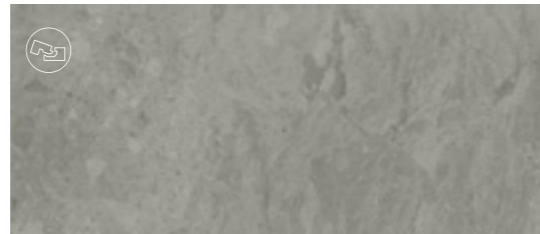Bianco Breccia Marble **VGT3021**Grigio Breccia Marble **VGT3019**

177,8mm x 711,2mm

Palazzo Marble **SM-VGT2413**

	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	EN ISO 24346	3,0 mm
Wear layer	EN ISO 24340	0,55 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	15 years 15 years 30 years
Bevelled edge		Micro
Mass unit per area	EN ISO 23997	5187 g/m ²
Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥7)
Abrasion resistance	EN 649 EN ISO 10582	Group T Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN 434 / EN ISO 23999	Pass (≤0,25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 4 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN 433 / EN ISO 24343-1	Pass (≤0,1 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass
Thermal resistance	ISO 8302	0,0118 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	DIN 51130 EN 13893	R10 DS
Environmental	French VOC regulation (ISO 1600) Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration DIBt/AgBB ISO 14001 / ISO 9001	A+ Gold certification; Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Pass Manufactured to quality and environment management systems standards
Adhesive		Please refer to our recommended adhesive list
Recycling		Suitable
Phthalate free		Yes



This product is also available in a rigid core format.

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



■ Palazzo Marble **SM-VGT2413**
 Canadian Urban Oak **SM-VGW8116**





Gluedown Abstract





Kaleidoscope



Apex





Hexa





Pyramid





Cubix





Pennon



Half Pennon



Tripoint



Individual shapes are cut from original Designflooring products so that they retain our authentic designs and key technical specification including slip resistance and wear layer. With over 100 different colours to choose from, the precise technical specification for your Kaleidoscope product will depend on your final selection. Please contact your business manager for further details on how to order.

Kaleidoscope set designs: We also offer a range of Kaleidoscope products which have smaller dimensions and shorter lead times to suit a smaller environment.



Pyramid KAL01



Cubix KAL02




Cubix KAL03



Pennon KAL04



Pennon KAL05



Apex KAL06



Apex KAL07



Hexa KAL08




Hexa KAL09



Tripoint KAL10



Cubix KAL13

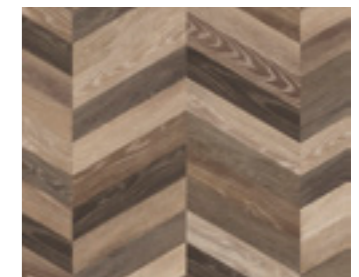

Apex KAL14



Woven KAL11



Woven KAL12



□ Hexa KAL09



□ Pennon KAL04



□ Apex KAL07

Heritage Collection



228,6mm x 228,6mm



Clifton **CLIF-01**



Clifton **CLIF-02**




Clifton **CLIF-03**




Clifton **CLIF-04**


228,6mm x 228,6mm with a 76,2mm x 76,2mm key-square




Lansdown **LANS-01**



Lansdown **LANS-02**



Lansdown **LANS-03**



Lansdown **LANS-04**

152,4mm x 152,4mm & 53,8mm x 53,8mm



Montpellier **MONT-01**




Montpellier **MONT-02**



Montpellier **MONT-03**



Montpellier **MONT-04**




Montpellier **MONT-05**



Montpellier **MONT-06**




Montpellier **MONT-07**




Montpellier **MONT-08**

304,8mm x 304,8mm



Mayfair **MAYF-01**



Mayfair **MAYF-02**

	Standard	2,5 mm result
Size	EN ISO 24342	Various
Thickness	EN ISO 24346	2,5 mm
Wear layer	EN ISO 24340	0,55 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	15 years 15 years 30 years
Slip resistance**	DIN 51130 EN 13893	R10 DS
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.





Montpellier MONT-01




Mayfair MAYF-01




Clifton CLIF-04

Heritage
Collection


GLUEDOWN




457,2mm x 457,2mm




Dalмата SP121



Salute Blanco SP122




Pleta SP120



Dolce SP119

152,4mm x 914,4mm




Chalk Grey SP724




Yellow Ochre SP726



Burnt Sienna SP719



Black Iron SP727



Zinc SP722




Amber SP721




Indigo SP720

457,2mm x 914,4mm



Zinc SP723




Chalk Grey SP725



Black Iron SP728




San Marco SP729




Leoncini SP730




Stratus SP731




Umbra SP732




Contarini SP734




Tizina SP735



Interseco SP736



Statera SP737



Industria SP738



Concreto SP739

	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	EN ISO 24346	2,5 mm
Wear layer	EN ISO 24340	0,55 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	15 years 15 years 30 years
Bevelled edge		Micro
Mass unit per area	EN ISO 23997	4398 g/m ²
Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN 649 EN ISO 10582	Group T Type 1
Flexibility	EN 434/EN ISO 23999	Pass
Dimensional stability	EN 434 / EN ISO 23999	Pass (≤0,25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN ISO 24343-1	Pass (≤0,1 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass
Thermal resistance	ISO 8302	0,0097 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	DIN 51130 EN 13893	R10 DS
Environmental	French VOC regulation (ISO 1600) Indoor Air Comfort FloorScore SCS-EC10.3-2014 v4.0 DIBt/AgBB ISO 14001 / ISO 9001	A+ Gold certification; Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. Pass Manufactured to quality and environment management systems standards
Adhesive		Please refer to our recommended adhesive list
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Opus
GLUEDOWN




Salute Bianco SP122



Indigo SP720 | Chalk Grey SP724 | Contarini SP734



Burnt Sienna SP719 | Chalk Grey SP725 | Dalmata SP121

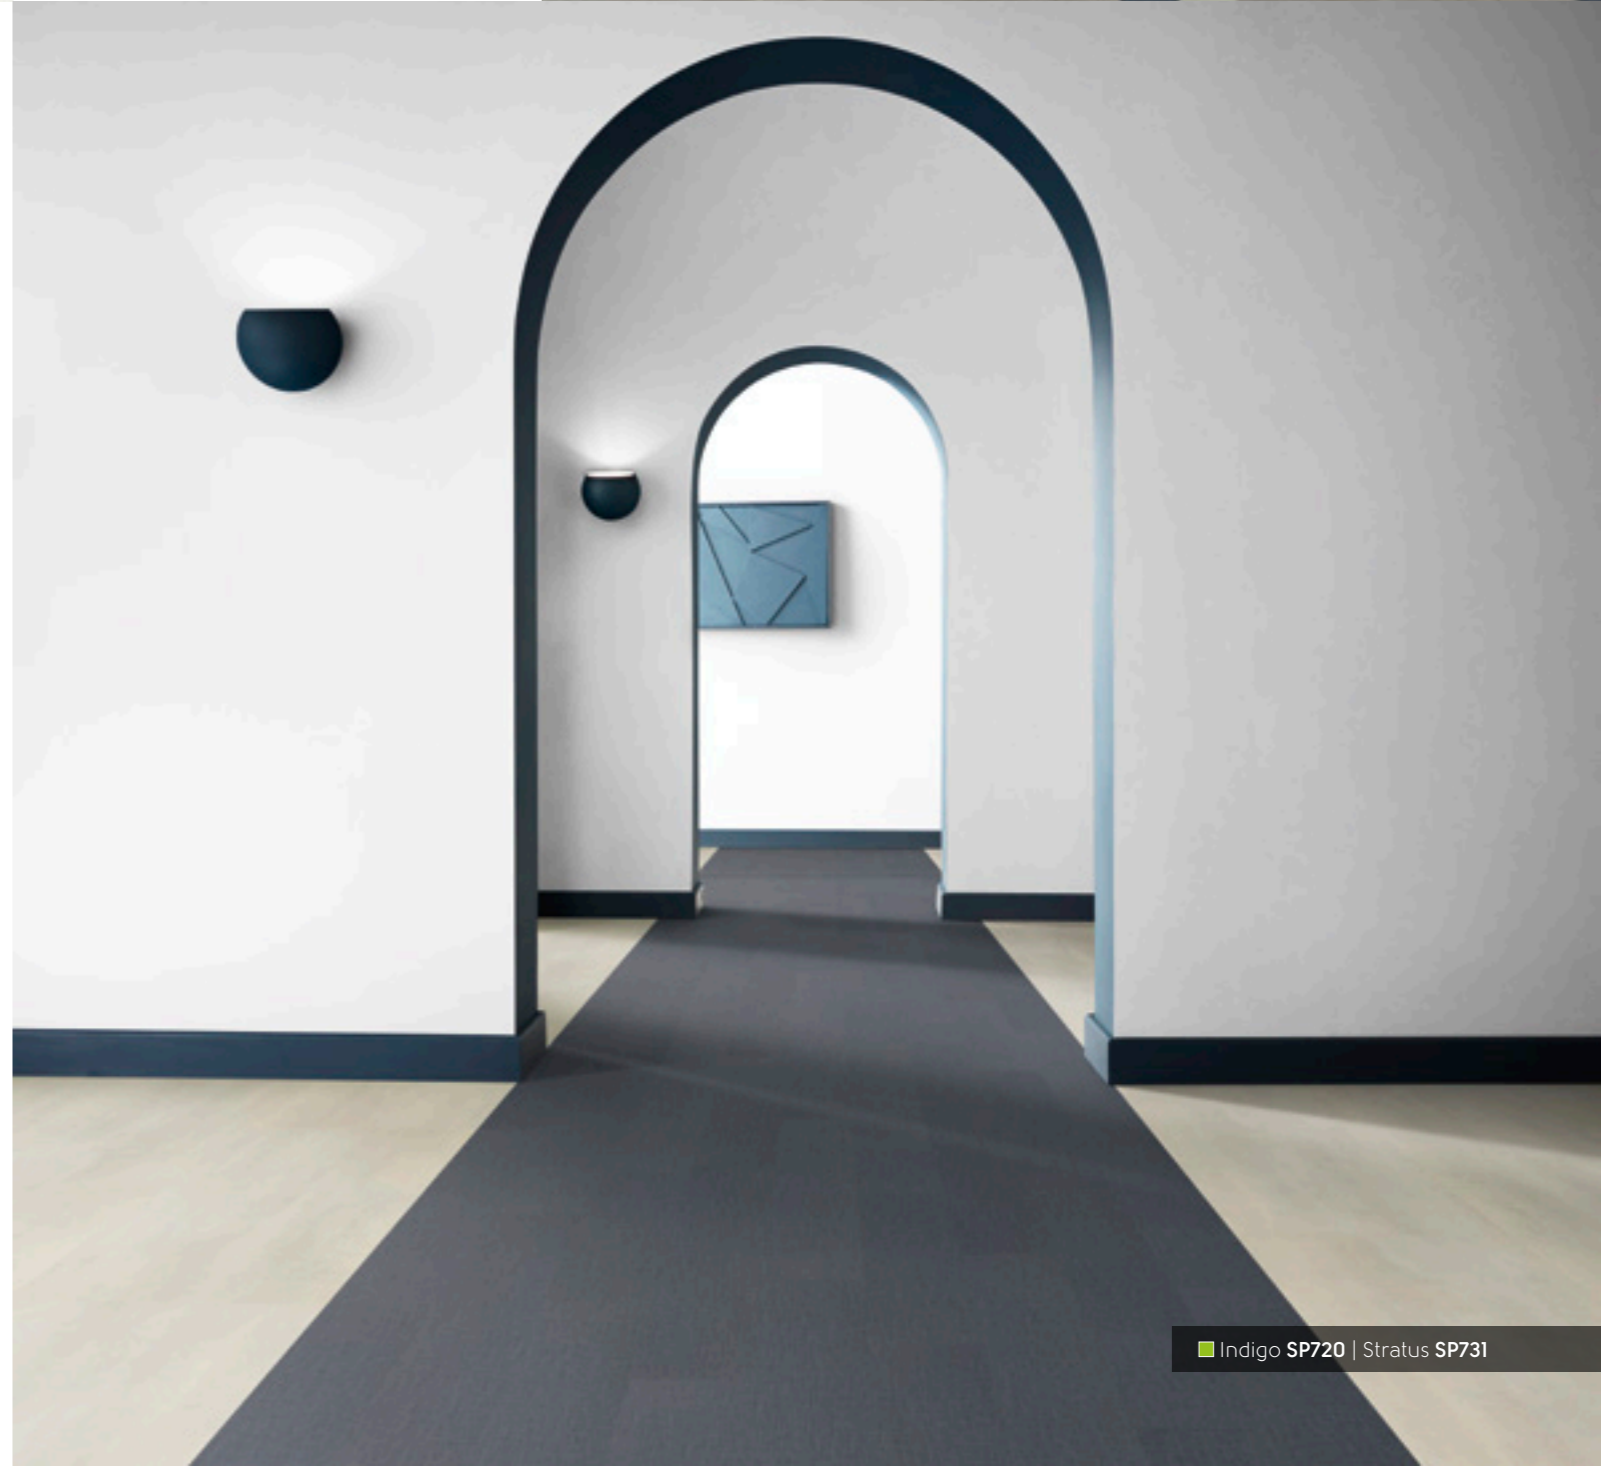

Indigo SP720 | Stratus SP731

Loose lay Wood






Designflooring LooseLay Wood

1050,0mm x 250,0mm

Salina **LLP161**Bridgeport **LLP157**Levanzo **LLP150**Palmaria **LLP149**Brockton **LLP153**Budelli **LLP146**Ashland **LLP95**Waterbury **LLP152**Stamford **LLP109**Lampione **LLP147**Hamden **LLP156**Sardinia **LLP143**Country Oak **LLP92**Cambridge **LLP113**Heritage Oak **LLP102**Sicilia **LLP142**Providence **LLP108**Antique Timber **LLP106**Hudson **LLP99**Torcello **LLP145**Linosa **LLP148**Tavolara **LLP144**



1500,0mm x 250,0mm

Champagne Oak **LLP310**Bleached Tasmanian Oak **LLP311**Lemon Spotted Gum **LLP317**Pearl Oak **LLP306**Reclaimed Heart Pine **LLP305**Weathered Heart Pine **LLP304**Taupe Oak **LLP309**French Grey Oak **LLP308**Neutral Oak **LLP307**Twilight Oak **LLP301**

	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	EN ISO 24346	4,5 mm
Wear layer	EN ISO 24340	0,55 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	15 years 15 years 30 years
Bevelled edge		No
Mass	EN ISO 23997	7470 g/m ²
Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥ 7)
Abrasion resistance	EN 649 EN ISO 10582	Group T Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN 434 / EN ISO 23999	Pass (≤ 0,10%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 13 dB
Indentation - residual	EN 433 / EN ISO 24343-1	Pass (≤ 0,1 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass
Thermal resistance	ISO 8302	0,0245 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	DIN 51130 EN 13893	R10 DS
VOC emission	Indoor Air Comfort French VOC regulation (ISO 1600) Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. A+ Indoor air quality certified; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification) Manufactured to quality and environment management systems standards
Adhesive	Most applications will not require the use of adhesives. However, we recommend the use of a tackifier for heavy traffic areas.	
Recycling	Suitable	
Phthalate free	Yes	

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

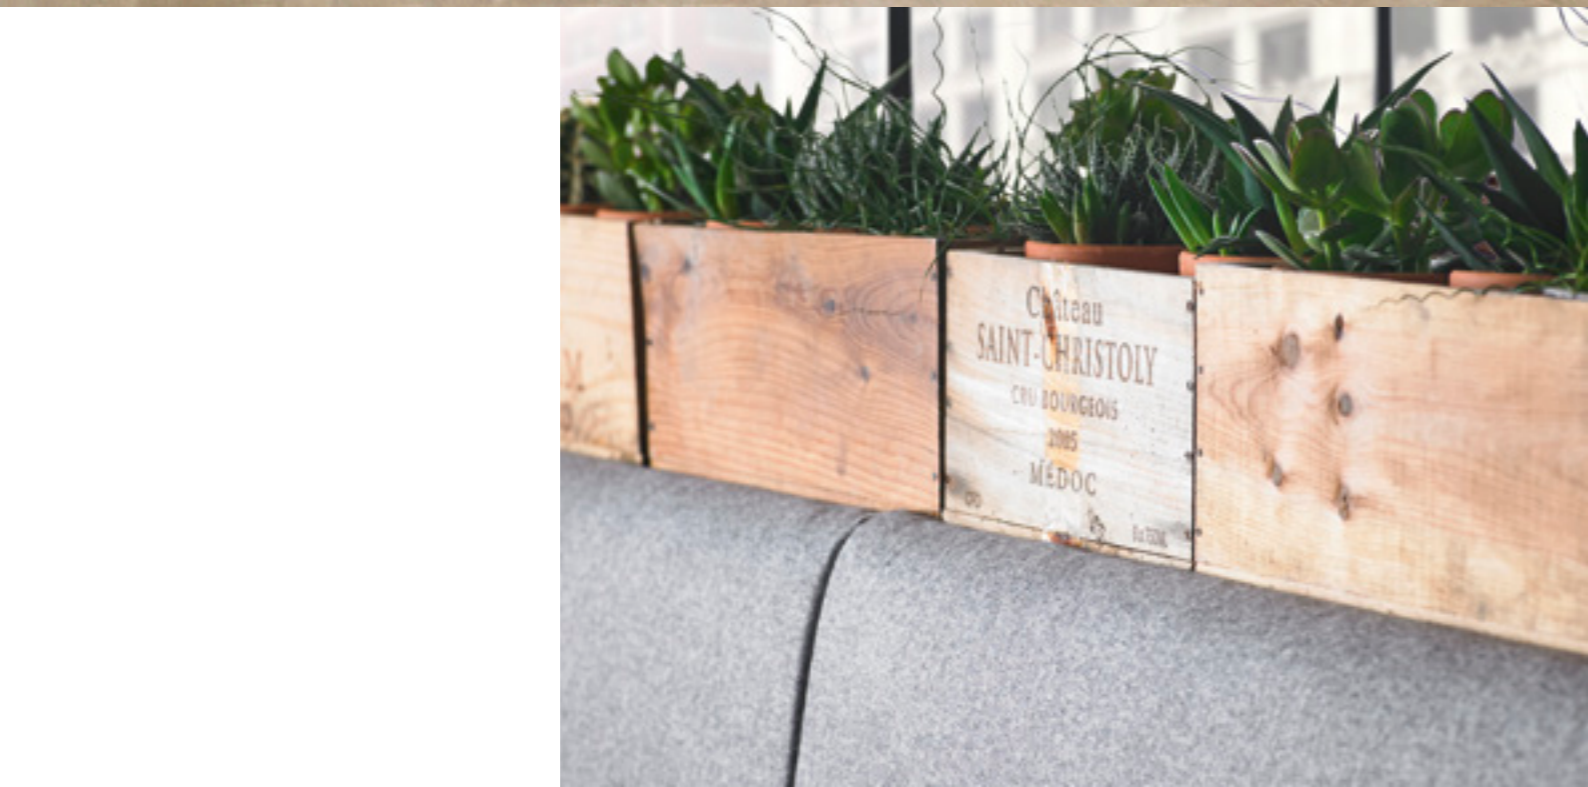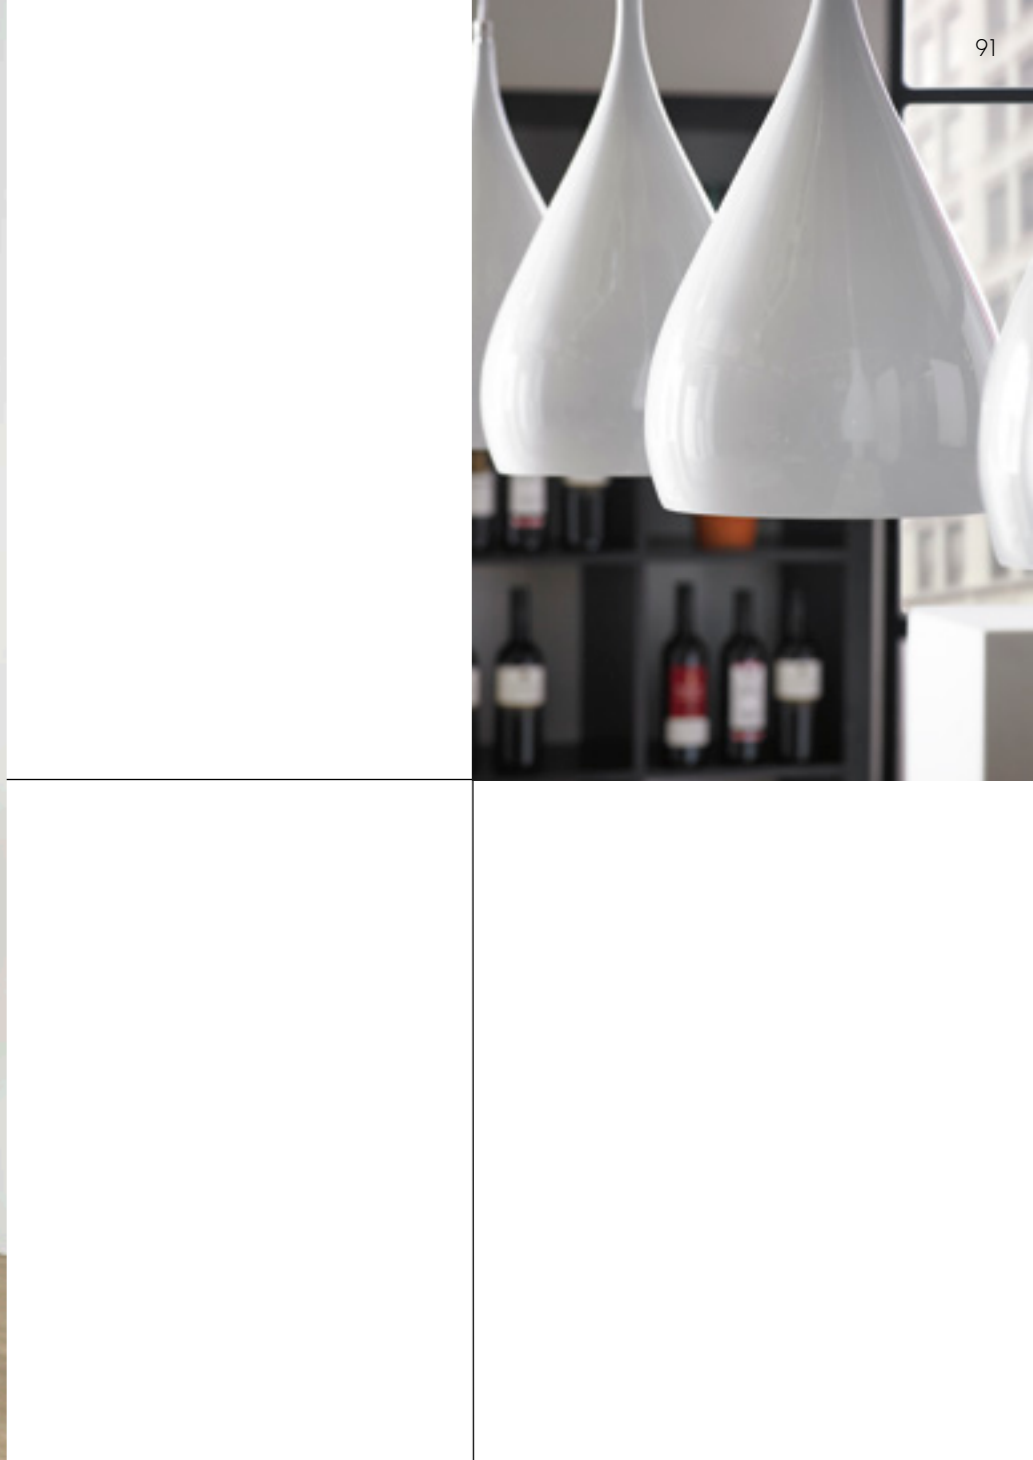

Designflooring
LooseLay

LOOSE LAY


■ Pearl Oak LLP306




Designflooring LooseLay Stone



500,0mm x 610,0mm




Tino LLT208



Alaska LLT215




Quebec LLT219




Capri LLT209



Utah LLT216




Colorado LLT201




Nisida LLT210



Vermont LLT217



Vulcano LLT211



Madison LLT203



Vermont LLT217 | Alaska LLT215

	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	EN ISO 24346	4,5 mm
Wear layer	EN ISO 24340	0,55 mm
Surface treatment		K-Guard+® PU coating
Guarantee*	Light industrial Commercial Residential	15 years 15 years 30 years
Bevelled edge		No
Mass	EN ISO 23997	7470 g/m ²
Standards	EN 649 / EN ISO 10582	Heterogeneous PVC
Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥ 7)
Abrasion resistance	EN 649 EN ISO 10582	Group T Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN 434 / EN ISO 23999	Pass (≤ 0,10%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _w = 13 dB
Indentation - residual	EN 433 / EN ISO 24343-1	Pass (≤ 0,1 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass
Thermal resistance	ISO 8302	0,0245 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	DIN 51130 EN 13893	R10 DS
VOC emission	Indoor Air Comfort French VOC regulation (ISO 1600) Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. A+ Indoor air quality certified; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification) Manufactured to quality and environment management systems standards
Adhesive	Most applications will not require the use of adhesives. However, we recommend the use of a tackifier for heavy traffic areas.	
Recycling	Suitable	
Phthalate free	Yes	

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Rigid core Wood



1220,0mm x 180,0mm

Rose Washed Oak **SCB-KP95**Pale Limed Oak **SCB-KP94**Mid Limed Oak **SCB-KP96**Classic Limed Oak **SCB-KP97**Washed Scandi Pine **SCB-KP132**White Painted Oak **SCB-KP105**Grey Scandi Pine **SCB-KP131**Grey Limed Oak **SCB-KP138**Lime Washed Oak **SCB-KP99**Light Worn Oak **SCB-KP104**

This product is also available in a gluedown format.


	Standard	Result
Size	EN ISO 24342	1220,0 mm x 180,0 mm
Thickness	ISO 24346	4,5 mm
Wear layer	ISO 24340	0,3 mm
Locking system*		2G™ angling installation
Surface treatment		K-Guard+® PU coating
Guarantee**	Commercial Domestic	10 years 30 years
Bevelled edge		No
Mass	ISO 23997	7784 g m ²
Standards	EN 16511	Pass (multilayer modular floorcovering panels)
Classification	EN ISO 10874 Commercial EN ISO 10874 Domestic	31: Commercial moderate 23: Domestic heavy
Reaction to fire	EN 13501-1	Bfl-s1
Staining	EN 438-2	Pass (grade 5)
Light fastness	EN ISO 105-B02	Pass (≥ 6)
Abrasion resistance	EN13329 Annex E	Pass (> 1200 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	EN 434/EN ISO 23999	Pass (≤ 0,25%)
Acoustic impact noise reduction	EN ISO 10140-1:2016	ΔL _w = 19 dB
Indentation - residual	ISO 24343-1	Pass (≤ 0,1 mm)
Impact resistance	EN13329 Annex F	Pass (≥ 1800 mm)
Castor chair continuous use	EN 425/ISO 4918	Pass (10 000 cycles)
Thermal resistance	ISO 8302	0,0184 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance***	EN 13893 DIN 51130	DS R10
	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	French VOC regulation (ISO 16000)	A+
Environmental	Floorscore SCS-EC10.3-2014 v4.0 ISO 14001 / ISO 9001	Indoor air quality certified; Compliant low emitting VOC emissions. Manufactured to quality and environment management systems standards
Adhesive	None required; please install according to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

^ 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.





■ Grey Limed Oak SCB-KP138

Van Gogh Wood



Natural Wood Grain Emboss

A selection of our Van Gogh designs have been finished with a handcrafted emboss to ensure that each plank is inherently unique and thereby accentuating the natural aesthetics of the wood. Look out for our natural wood grain icon to see which of our designs benefit from this natural finish.

708,0mm x 177,0mm x 17,8mm



Neutral Brushed Oak **SM-VGW126T-RKP**



Warm Brushed Oak **SM-VGW121T-RKP**



Grey Brushed Oak **SM-VGW120T-RKP**



Canadian Urban Oak **SM-VGW8116-RKP**



Golden Brushed Oak **SM-VGW122T-RKP**



Texas Grey Ash **SM-VGW8239-RKP**

1220,0mm x 180,0mm



Natural Prime Oak **VGW115T-SCB**



Light Country Oak **VGW139T-SCB**



French Oak **VGW85T-SCB**



Light Distressed Oak **VGW111T-SCB**




Auckland Oak **VGW52T-SCB**



Country Oak **VGW81T-SCB**




Classic Oak **VGW86T-SCB**



Distressed Oak **VGW82T-SCB**

1420,0mm x 225,0mm



Texas White Ash **RKP8105**



Grey Brushed Oak **VGW120T-RKP**




Neutral Brushed Oak **VGW126T-RKP**




Texas Grey Ash **VGW8239**




Warm Ash **RKP8103**



Canadian Urban Oak **RKP8116**



Canadian Nude Oak **RKP8117**




Baltic Washed Oak **RKP8101**




Baltic Limed Oak **RKP8111**



Smoked Butternut **RKP8107**



Warm Brushed Oak **VGW121T-RKP**



Golden Brushed Oak **VGW122T-RKP**



	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	ISO 24346: 1420,0 x 225,0 / 708,0 x 177,0 1220,0 x 180,0	6,5 mm 5,5 mm
Wear layer	ISO 24340	0,55 mm
Locking system*	1420,0 x 225,0 708,0 x 177,0 / 1220,0 x 180,0	5G® fold down installation system** 2G™ angling installation
Surface treatment		K-Guard+® PU coating
Guarantee**	Commercial Domestic	15 years 30 years
Bevelled edge		Micro
Mass	ISO 23997: 1420,0 x 225,0 / 708,0 x 177,0 1220,0 x 180,0	7480 g m ⁻² 9037 g m ⁻²
Standards	EN 16511	Multilayer modular floorcovering panels
Classification	EN ISO 10874 Commercial EN ISO 10874 Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	Bfl-s1
Staining	EN 438-2	Pass (grade 5)
Light fastness	EN ISO 105-B02	Pass (≥ 6)
Abrasion resistance	EN13329 Annex E	Pass (> 4000 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	BS EN ISO 23999	Pass (≤ 0,25%)
Swelling	ISO 24336: 1420,0 x 225,0 / 708,0 x 177,0 1220,0 x 180,0	Pass (0,2%) Pass (0,7%)
Acoustic impact noise reduction	EN ISO 10140-1:2016: 1420,0 x 225,0 / 708,0 x 177,0 1220,0 x 180,0 EN ISO 10140-3:2010+A1:2015: 1420,0 x 225,0 / 708,0 x 177,0 1220,0 x 180,0	ΔL _W = 21 dB ΔL _W = 19 dB ΔL _{LIN} = 11 dB ΔL _{LIN} = 9 dB
Indentation - residual	ISO 24343-1	Pass (≤ 0,1 mm)
Impact resistance	EN13329 Annex F: 1420,0 x 225,0 / 708,0 x 177,0 1220,0 x 180,0	Pass (≥ 1800 mm) Pass (≥ 1600 mm)
Castor chair continuous use	ISO 4918/EN 425	Pass (25 000 cycles)
Thermal resistance	ISO 8302: 1420,0 x 225,0 / 708,0 x 177,0 1220,0 x 180,0	0,0515 m ² K/W Suitable for underfloor heating. Max 27°C 0,0338 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance****	EN 13893 DIN 51130	DS R10
Environmental	Indoor Air Comfort FloorScore SCS-EC10.3-2014 v4.0 ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. Manufactured to quality and environment management systems standards
Adhesive	None required; please install according to our installation instructions.	
Recycling	Suitable	
Phthalate free	Yes	



This product is
also available in a
gluedown format.


* 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license. 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

** 5G® short edge; 2G™ long edge except SM-VGW120T-RKB, SM-VGW121T-RKB, SM-VGW122T-RKB, SM-VGW126T-RKB which are modified 2G™ on short edge and standard 2G™ on long edge.

*** Subject to terms. Please see our website.

**** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



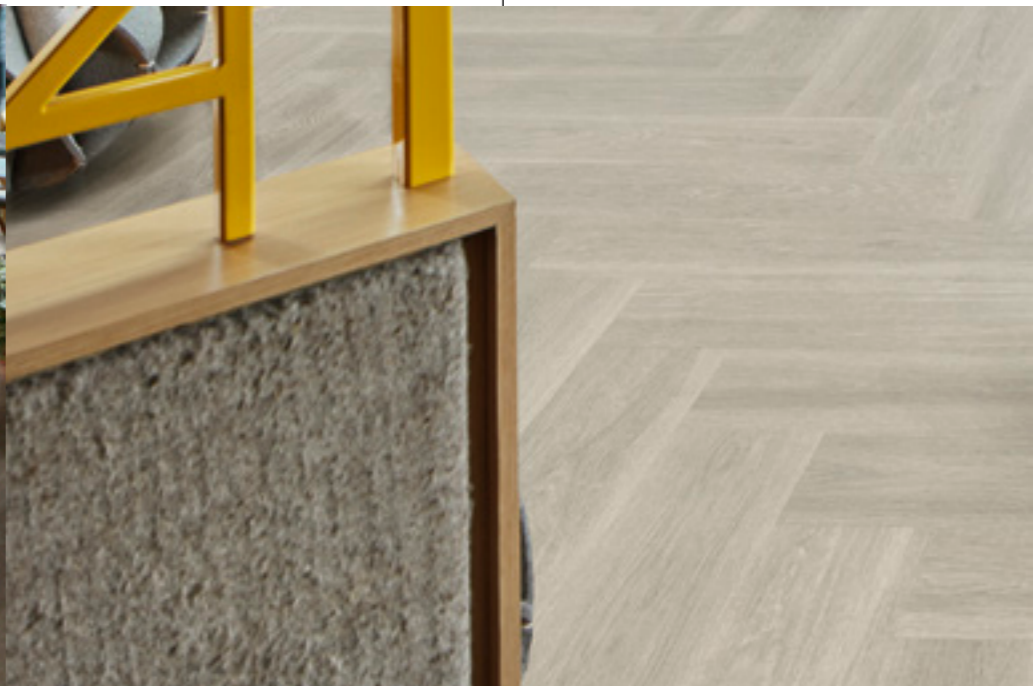

Van Gogh
RIGID CORE




■ Grey Brushed Oak
VGW120T-RKP | SM-VGW120T-RKP



Rigid core Stone

Rubens Stone

304,8mm x 457,2mm

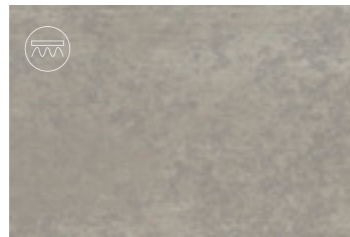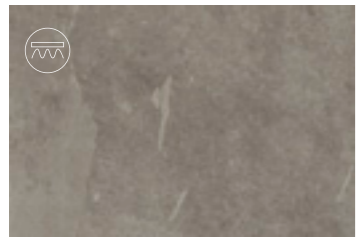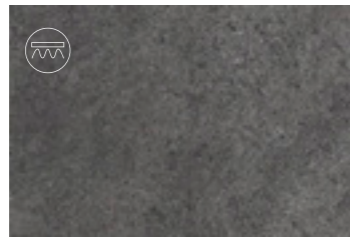Frosted Marble **SCB-ST26-18**Smoked Concrete **SCB-ST22-18**Grey Riven Slate **SCB-ST16-18**Cumbrian Stone **SCB-ST14-18**

	Standard	Result
Size	EN ISO 24342	304,8mm x 457,2mm
Thickness	ISO 24346	4,5 mm
Wear layer	ISO 24340	0,3 mm
Locking system*		2G™ angling installation
Surface treatment		K-Guard+® PU coating
Guarantee**	Commercial Domestic	10 years 30 years
Bevelled edge		No
Mass	ISO 23997	7784 g m ⁻²
Standards	EN 16511	Pass (multilayer modular floorcovering panels)
Classification	EN ISO 10874 Commercial EN ISO 10874 Domestic	31: Commercial moderate 23: Domestic heavy
Reaction to fire	EN 13501-1	Bfl-s1
Staining	EN 438-2	Pass (grade 5)
Light fastness	EN ISO 105-B02	Pass (≥ 6)
Abrasion resistance	EN13329 Annex E	Pass (> 1200 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	EN 434/EN ISO 23999	Pass (≤ 0,25%)
Acoustic impact noise reduction	EN ISO 10140-1:2016	ΔL _w = 19 dB
Indentation - residual	ISO 24343-1	Pass (≤ 0,1 mm)
Impact resistance	EN13329 Annex F	Pass (≥ 1800 mm)
Castor chair continuous use	EN 425/ISO 4918	Pass (10 000 cycles)
Thermal resistance	ISO 8302	0,0184 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance***	EN 13893 DIN 51130	DS R10
	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	French VOC regulation (ISO 16000)	A+
Environmental	Floorscore SCS-EC10.3-2014 v4.0 ISO 14001 / ISO 9001	Indoor air quality certified; Compliant low emitting VOC emissions. Manufactured to quality and environment management systems standards
Adhesive	None required; please install according to our installation instructions.	
Recycling	Suitable	
Phthalate free	Yes	

^ 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



This product is also available in a gluedown format.





■ Smoked Concrete SCB-ST22-18

Rubens
RIGID CORE



■ Frosted Marble SCB-ST26-18





■ Grey Riven Slate SCB-ST16-18



Van Gogh Stone




457,0mm x 600,0mm

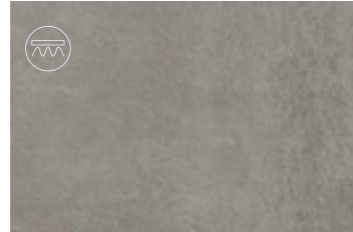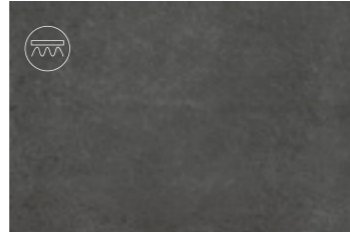Palazzo Marble **RKT2413**Roman Slate **VGT2422-RKT**Milanese Slate **VGT2420-RKT**

457,0mm x 935,0mm

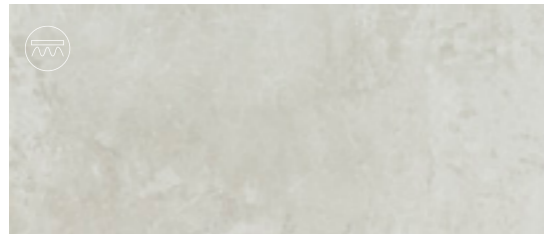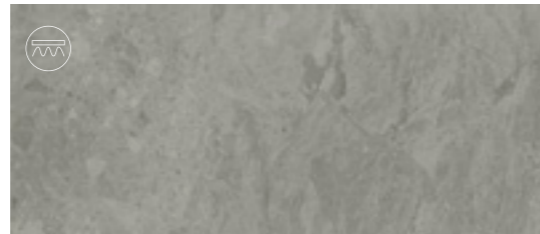Bianco Breccia Marble **VGT3021-RKT**Grigio Breccia Marble **VGT3019-RKT**

177,8mm x 711,2mm

Palazzo Marble **SM-VGT2413**

	Standard	Result
Size	EN ISO 24342	See page opposite
Thickness	ISO 24346	6,5 mm
Wear layer	ISO 24340	0,55 mm
Locking system*	457,0 x 600,0 / 457,0 x 935,0 177,0 x 708,0	5G® fold down installation system** 2G™ angling installation
Surface treatment		K-Guard+® PU coating
Guarantee**	Commercial Domestic	15 years 30 years
Bevelled edge		Micro
Mass	ISO 23997	7480 g m ⁻²
Standards	EN 16511	Multilayer modular floorcovering panels
Classification	EN ISO 10874 Commercial EN ISO 10874 Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	Bfl-s1
Staining	EN 438-2	Pass (grade 5)
Light fastness	EN ISO 105-B02	Pass (≥ 6)
Abrasion resistance	EN13329 Annex E	Pass (> 4000 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	BS EN ISO 23999	Pass (≤ 0,25%)
Swelling	ISO 24336	Pass (0,2%)
Acoustic impact noise reduction	EN ISO 10140-1:2016 and EN ISO 10140-3:2010+A1:2015	ΔL _W = 21 dB ΔL _W = 19 dB ΔL _{LIN} = 11 dB ΔL _{LIN} = 9 dB
Indentation - residual	ISO 24343-1	Pass (≤ 0,1 mm)
Impact resistance	EN13329 Annex F: 1420,0 x 225,0 / 708,0 x 177,0 1220,0 x 180,0	Pass (≥ 1800 mm) Pass (≥ 1600 mm)
Castor chair continuous use	ISO 4918/EN 425	Pass (25 000 cycles)
Thermal resistance	ISO 8302: 1420,0 x 225,0 / 708,0 x 177,0 1220,0 x 180,0	0,0515 m ² K/W Suitable for underfloor heating. Max 27°C 0,0338 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance****	EN 13893 DIN 51130	DS R10
Environmental	Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. Manufactured to quality and environment management systems standards
Adhesive	None required; please install according to our installation instructions.	
Recycling	Suitable	
Phthalate free	Yes	



This product is also available in a gluedown format.


* 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license. 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

** 5G® short edge; 2G™ long edge except SM-VGW120T-RKB, SM-VGW121T-RKB, SM-VGW122T-RKB, SM-VGW126T-RKB which are modified 2G™ on short edge and standard 2G™ on long edge.

*** Subject to terms. Please see our website.

**** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



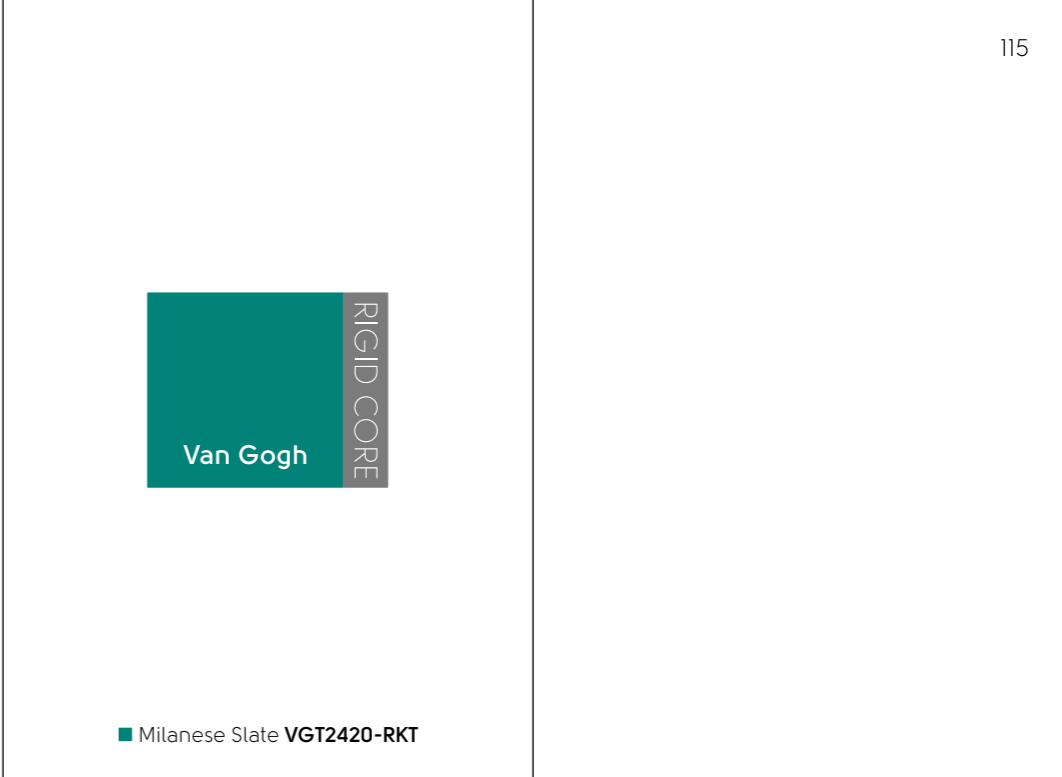

Van Gogh
RIGID CORE


■ Milanese Slate VGT2420-RKT



Versilay InstaShield™ Underlay

Our underlay offers a comprehensive solution to install gluedown floors with minimal floor preparation and adhesive, while offering up to 15dB impact sound reduction when combined with any of our gluedown floors.

- ✓ Can be used immediately after installation
- ✓ No expansion gaps required when installed
- ✓ Can be installed on most existing resilient floorcoverings
- ✓ Built in moisture vapour barrier included
- ✓ Suitable for commercial environments

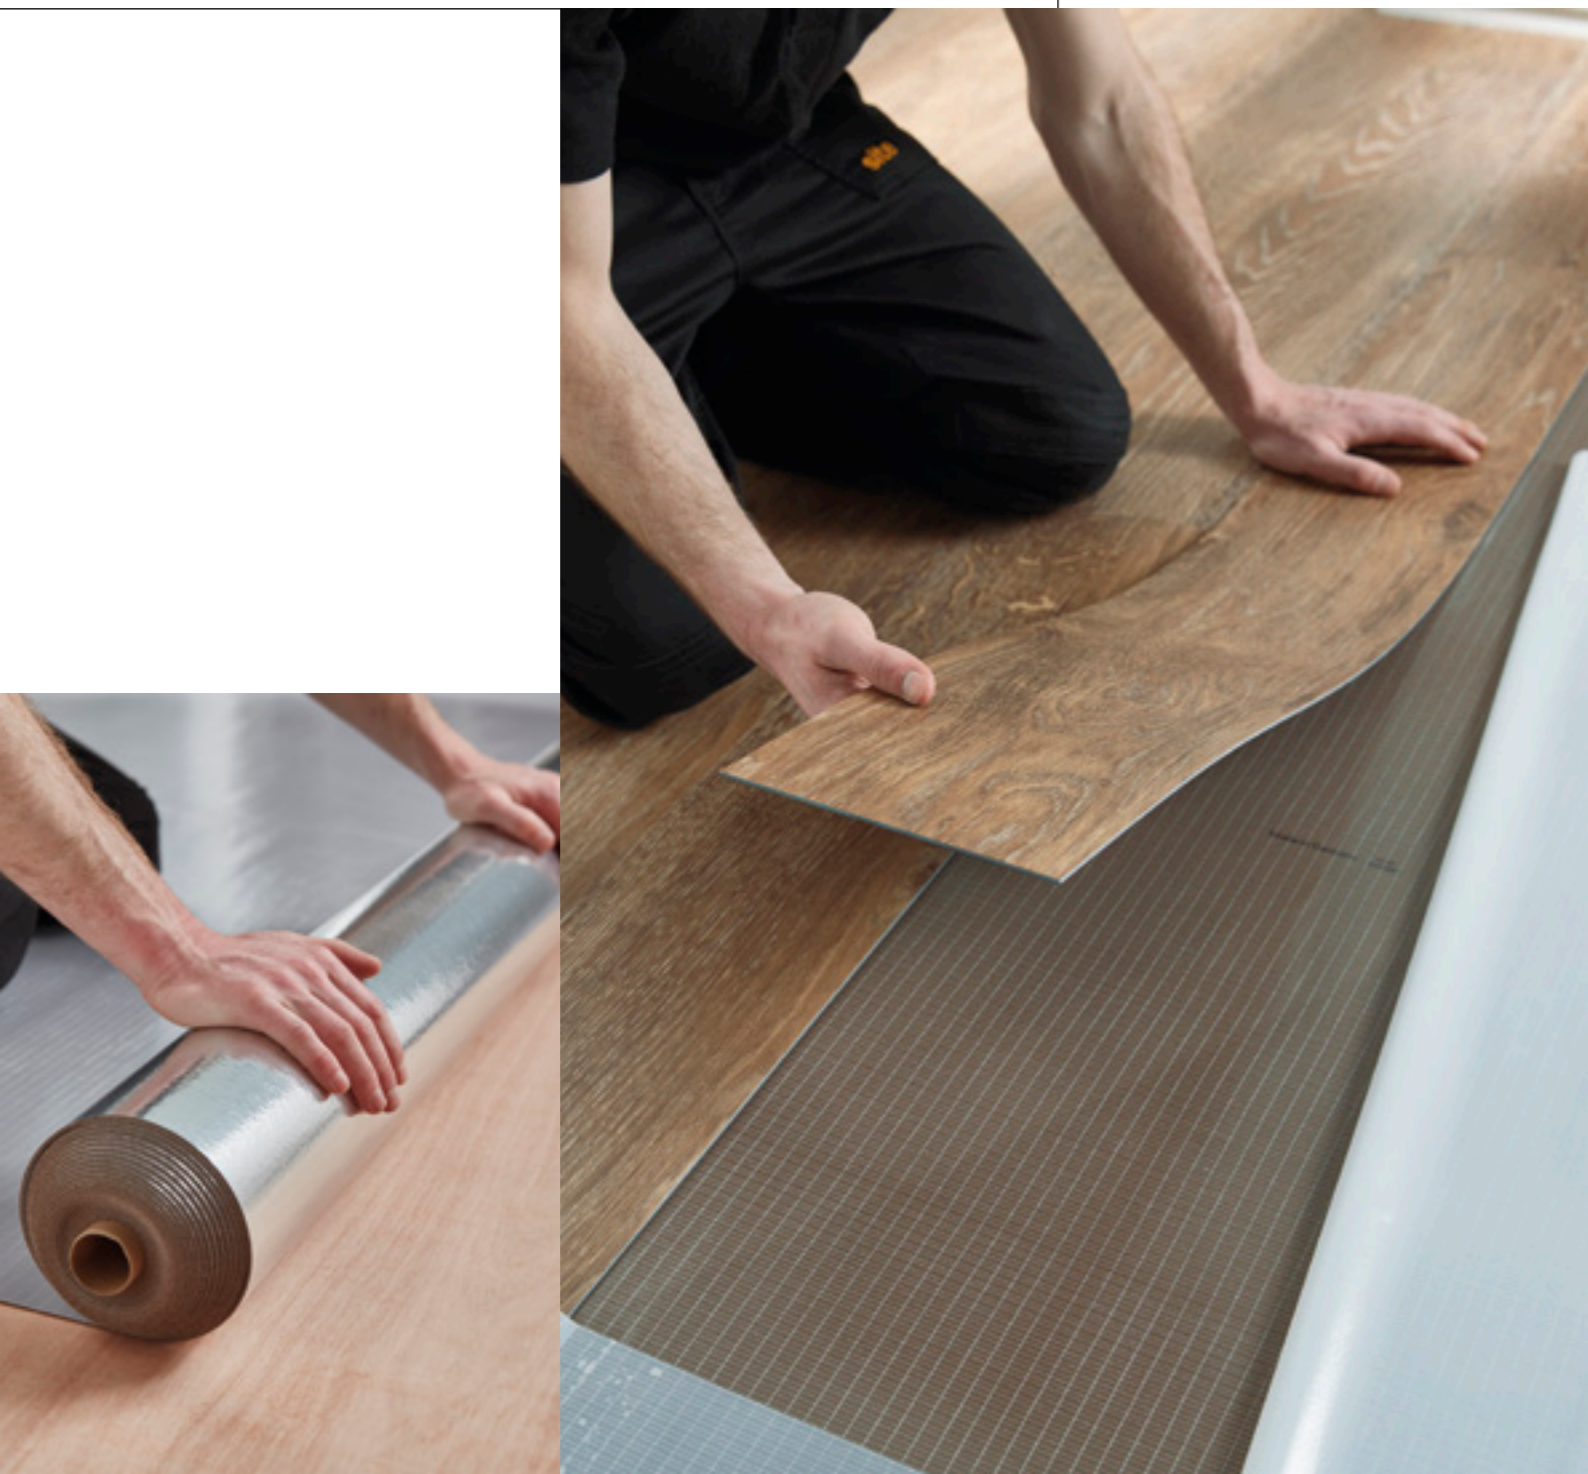

Versilay InstaShield™ technical specification



	Standard	Result
Size	DIN EN 16354:2019-01	Length: 8000 mm Width: 1000 mm (± 1,00 mm)
Thickness	DIN EN 16354:2019-01	~ 2,0 mm (± 0,15 mm)
Mass per unit area		~ 2,00 kg/m² (± 0,15 kg/m²)
Guarantee*		See specific Designflooring range
Reflected walking sound		up to 7 %
Acoustic impact noise reduction**	DIN EN 16251-1	~ 15 dB
Indentation - residual	DIN EN 16354:2019-01	0,01 m²K/W (- 0,1 TOG)
Thermal resistance	DIN EN ISO 24343-1	< 0,34 mm
Compressive strength	acc. to DIN EN 826 (250 Pa, 0,5 mm)	> 45 t/m² (> 450 kPa)
Compressive creep	DIN EN 16354:2019-01	> 50 kPa
Dynamic load		
Resistance to large ball	DIN EN 16354:2019-01	~ 800 mm
Punctual conformability	DIN EN 16354:2019-01	~ 0,79 mm
Reaction to fire	DIN EN 13501-1	B _s -s1
Environmental	French VOC regulation (ISO 16000) DIBt/AgBB ISO 14001 / ISO 9001	A+ Pass Manufactured to quality and environment management systems standards.
Phthalate free		Yes
Free from plasticizers, asbestos, formaldehyde, halogens and heavy metals		Yes

* We do not recommend this underlay be installed with other brands of floorcoverings, please contact customer services for further information.
Underlay does not include an industrial guarantee for any range.

** Combined results with LVT adhered



Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)




www.blauer-engel.de/uz156



Resources

Visit us online at designflooring.com


Visit our Technical Hub

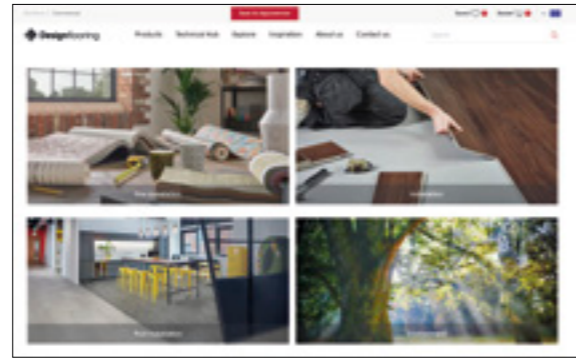

Check out our environmental information



Explore case studies

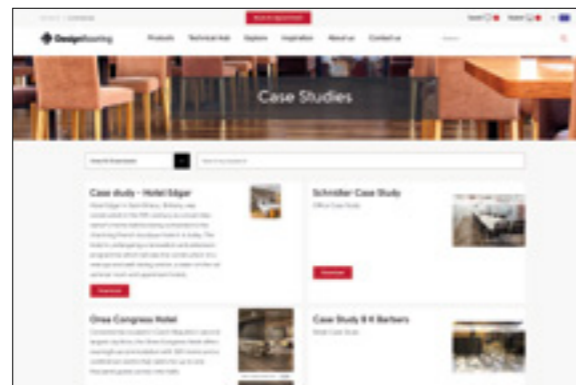

Download BIM component



Floorstyle Design Tool

The digital tool not only lets you see our wide range of luxury vinyl flooring in typical settings, but you can now upload a photo of any space and instantly see what a new floor might look like in that setting.



The interactive journey








We invite you on a journey. A chance to experience our products in an unparalleled way. Whether specifying for work, life or play, this immersive CGI tool puts you at the centre of a 360-degree virtual environment. Helping you visualise flooring in a real-world setting.

Keep up to date with us



Approved adhesive suppliers

When purchasing adhesive for fixing our floors, we recommend selecting one from our list of approved suppliers below.
Contact your local Designflooring business manager.

	Product format	Germany	France	Netherlands	Poland	International
	LVT Gluedown	UZIN KE66	UZIN KE66	UZIN KE66	UZIN KE66	UZIN KE66
		UZIN KE2000S	UZIN KE2000S	UZIN KE2000S	UZIN KE2000S	UZIN KE2000S
	LVT LooseLay	UZIN U 5000	UZIN U 5000	UZIN U 5000	UZIN U 5000	UZIN U 5000
		UZIN U 3000	UZIN U 3000	UZIN U 3000	UZIN U 3000	UZIN U 3000
	LVT Gluedown	STIX A930 MULTIFASER	STIX A800 PREMIUM	STIX A800 PREMIUM	STIX A930 MULTIFASER	STIX A930 MULTIFASER
		STIX A550 POWER ELASTIC	SADER TECH V8	STIX A550 POWER ELASTIC	STIX A800 PREMIUM	STIX A800 PREMIUM
		STIX A540 MULTIPLUS	MANG TECHNIMANG	STIX A540 MULTIPLUS	STIX A550 POWER ELASTIC	STIX A550 POWER ELASTIC STIX A540 MULTIPLUS
	LVT LooseLay	FIX A760 TECH	FIX A760 TECH	FIX A760 TECH	FIX A760 TECH	FIX A760 TECH
	LVT Gluedown	MAPEI ULTRABOND ECO 4 LVT	MAPEI ULTRABOND ECO 4 LVT	MAPEI ULTRABOND ECO 4 LVT	MAPEI ULTRABOND ECO 4 LVT	MAPEI ULTRABOND ECO 4 LVT
		MAPEI ULTRABOND ECO MS4 LVT	MAPEI ULTRABOND ECO MS4 LVT	MAPEI ULTRABOND ECO MS4 LVT	MAPEI ULTRABOND ECO MS4 LVT	MAPEI ULTRABOND ECO MS4 LVT
		MAPEI ULTRABOND ECO V4 SP	MAPEI ULTRABOND ECO V4 SP	MAPEI ULTRABOND ECO V4 SP	MAPEI ULTRABOND ECO V4 SP	MAPEI ULTRABOND ECO V4 SP
		MAPEI ULTRABOND ECO V4 EVOLUTION	MAPEI ULTRABOND ECO V4 EVOLUTION	MAPEI ULTRABOND ECO V4 EVOLUTION	MAPEI ULTRABOND ECO V4 EVOLUTION	MAPEI ULTRABOND ECO V4 EVOLUTION
		MAPEI ULTRABOND ECO VS90 PLUS	MAPEI ULTRABOND ECO VS90 PLUS	MAPEI ULTRABOND ECO VS90 PLUS	MAPEI ULTRABOND ECO VS90 PLUS	MAPEI ULTRABOND ECO VS90 PLUS
	LVT LooseLay	MAPEI Ultrabond ECO Tack TX+	MAPEI Ultrabond ECO Tack TX+	MAPEI Ultrabond ECO Tack TX+	MAPEI Ultrabond ECO Tack TX+	MAPEI Ultrabond ECO Tack TX+
	LVT Gluedown	SCHÖNOX DUROCOLL	CEGE 100 DUROCOLL	SCHÖNOX DUROCOLL	SCHÖNOX DUROCOLL	SCHÖNOX DUROCOLL
			CEGE HYBRID XTREM			
	LVT LooseLay	SCHÖNOX TACKIFIER	CEGE 100 DPA	SCHÖNOX ANTISLIP	SCHÖNOX TACKIFIER	SCHÖNOX TACKIFIER
	LVT Gluedown	MUREXIN D 495	MUREXIN D 495	MUREXIN D 495	MUREXIN D 495	MUREXIN D 495
		MUREXIN X-BOND MS-K499	MUREXIN X-BOND MS-K499	MUREXIN X-BOND MS-K499	MUREXIN X-BOND MS-K499	MUREXIN X-BOND MS-K499
		MUREXIN D 391	MUREXIN D 391	MUREXIN D 391	MUREXIN D 391	MUREXIN D 391
	LVT LooseLay	MUREXIN WL 720	MUREXIN WL 720	MUREXIN WL 720	MUREXIN WL 720	MUREXIN WL 720
	LVT Gluedown	WAKOL D 3317	WAKOL D 3317	WAKOL D 3317	WAKOL D 3317	WAKOL D 3317
		WAKOL D 3318	WAKOL D 3318	WAKOL D 3318	WAKOL D 3318	WAKOL D 3318
		WAKOL D 3319	WAKOL D 3319	WAKOL D 3319	WAKOL D 3319	WAKOL D 3319
		WAKOL D 3330	WAKOL D 3330	WAKOL D 3330	WAKOL D 3330	WAKOL D 3330
		WAKOL MS 550/552	WAKOL MS 550/552	WAKOL MS 550/552	WAKOL MS 550/552	WAKOL MS 550/552
	LVT LooseLay	WAKOL D 965	WAKOL D 965	WAKOL D 965	WAKOL D 965	WAKOL D 965
		WAKOL D 3110	WAKOL D 3110	WAKOL D 3110	WAKOL D 3110	WAKOL D 3110
	LVT Gluedown	K 188 E	K 188 E	K 188 E	K 188 E	K 188 E
		K 190 F	K 190 F	K 190 F	K 190 F	K 190 F
	LVT LooseLay	T 435	T 435	T 435	T 435	T 435
		T 425	T 425	T 425	T 425	T 425

Although Designflooring International recommend these adhesives, we cannot guarantee any listed products. The guarantee and liability regarding the failure of these products lie with the adhesive manufacturer.

Cleaning and maintenance

To keep your Designflooring floor in perfect condition, we recommend Dr. Schutz cleaning and maintenance solutions. They offer permanent finishes as well as cleaning and care products for your LVT flooring. Scan the QR code to discover a wide range of cleaning solutions.



Dr. Schutz®



Get in touch

Contact our Sales team for any help and information regarding which of our flooring would work best for your commercial space.

View existing case studies at designflooring.com

+44 1386 820105

sales@designflooring.com

Sample service

You can order full-size samples through our sales office or with the assistance of your dedicated Designflooring business manager. Immerse yourself in the versatility and durability of our LVT products. Contact us today to bring your vision to life.





Product overview

Wood products by range - **Gluedown**

RUBENS	Code	Product Name	Slip Resistance					Size	Box Quantity
			Thickness	Wear Layer	Bevel	DIN 51130	EN 13893		
	KP94-7	Pale Limed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KP95-7	Rose Washed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KP96-7	Mid Limed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KP97-7	Classic Limed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KP99-7	Lime Washed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI04-7	Light Worn Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI05-7	White Painted Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI31-7	Grey Scandi Pine	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI32-7	Washed Scandi Pine	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI38-7	Grey Limed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI44-7	Washed Character Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI46-7	Traditional Character Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI47-7	Coastline Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI52-7	Grey Studio Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI54-7	Dutch Limed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	KPI55-7	Honey Limed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 177,8mm	20 planks / 4,335m ²
	CH-KP95	Rose Washed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 228,6mm	12 planks / 3,345m ²
	CH-KPI56	Grey Washed Oak	2mm	0,3mm	No	R10	DS	1219,2mm x 228,6mm	12 planks / 3,345m ²

OPUS	Code	Product Name	Slip Resistance					Size	Box Quantity
			Thickness	Wear Layer	Bevel	DIN 51130	EN 13893		
	WP411	Niveus	2,5mm	0,55mm	Micro	R10	DS	1219,2mm x 228,6mm	12 planks / 3,345m ²
	WP414	Argen	2,5mm	0,55mm	Micro	R10	DS	1219,2mm x 228,6mm	12 planks / 3,345m ²
	WP418	Pallida	2,5mm	0,55mm	Micro	R10	DS	1219,2mm x 228,6mm	12 planks / 3,345m ²

VAN GOGH	Code	Product Name	Slip Resistance					Size	Box Quantity
			Thickness	Wear Layer	Bevel	DIN 51130	EN 13893		
	CM-VGW120T	Grey Brushed Oak	3mm	0,55mm	Micro	R10	DS	600,0mm x 120,0mm	56 planks / 4,032m ²
	CM-VGW121T	Warm Brushed Oak	3mm	0,55mm	Micro	R10	DS	600,0mm x 120,0mm	56 planks / 4,032m ²
	CM-VGW126T	Neutral Brushed Oak	3mm	0,55mm	Micro	R10	DS	600,0mm x 120,0mm	56 planks / 4,032m ²
	SM-VGW120T	Grey Brushed Oak	3mm	0,55mm	Micro	R10	DS	711,2mm x 177,8mm	26 planks / 3,288m ²
	SM-VGW121T	Warm Brushed Oak	3mm	0,55mm	Micro	R10	DS	711,2mm x 177,8mm	26 planks / 3,288m ²
	SM-VGW122T	Golden Brushed Oak	3mm	0,55mm	Micro	R10	DS	711,2mm x 177,8mm	26 planks / 3,288m ²
	SM-VGW126T	Neutral Brushed Oak	3mm	0,55mm	Micro	R10	DS	711,2mm x 177,8mm	26 planks / 3,288m ²
	SM-VGW8116	Canadian Urban Oak	3mm	0,55mm	Micro	R10	DS	711,2mm x 177,8mm	26 planks / 3,288m ²
	SM-VGW8239	Texas Grey Ash	3mm	0,55mm	Micro	R10	DS	711,2mm x 177,8mm	26 planks / 3,288m ²
	VGW52T	Auckland Oak	3mm	0,55mm	Micro	R10	DS	1219,2mm x 177,8mm	15 planks / 3,252m ²
	VGW81T	Country Oak	3mm	0,55mm	Micro	R10	DS	1219,2mm x 177,8mm	15 planks / 3,252m ²
	VGW82T	Distressed Oak	3mm	0,55mm	Micro	R10	DS	1219,2mm x 177,8mm	15 planks / 3,252m ²
	VGW85T	French Oak	3mm	0,55mm	Micro	R10	DS	1219,2mm x 177,8mm	15 planks / 3,252m ²
	VGW86T	Classic Oak	3mm	0,55mm	Micro	R10	DS	1219,2mm x 177,8mm	15 planks / 3,252m ²
	VGW111T	Light Distressed Oak	3mm	0,55mm	Micro	R10	DS	1219,2mm x 177,8mm	15 planks / 3,252m ²
	VGW115T	Natural Prime Oak	3mm	0,55mm	Micro	R10	DS	1219,2mm x 177,8mm	15 planks / 3,252m ²
	VGW120T	Grey Brushed Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²
	VGW121T	Warm Brushed Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²
	VGW122T	Golden Brushed Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²
	VGW126T	Neutral Brushed Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²
	VGW139T	Light Country Oak	3mm	0,55mm	Micro	R10	DS	1219,2mm x 177,8mm	15 planks / 3,252m ²
	VGW8101	Baltic Washed Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,25m ²
	VGW8103	Warm Ash	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,25m ²
	VGW8105	Texas White Ash	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,25m ²
	VGW8107	Smoked Butternut	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,25m ²
	VGW8111	Baltic Limed Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,25m ²
	VGW8116	Canadian Urban Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²
	VGW8117	Canadian Nude Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²
	VGW8239	Texas Grey Ash	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²
	VGW8240	Croftmore Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²
	VGW8241	Hayfield Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²
	VGW8242	Aviemore Oak	3mm	0,55mm	Micro	R10	DS	1422,4mm x 228,6mm	10 planks / 3,252m ²

Wood products by range - **Loose lay**

LOOSELAY	Code	Product Name	Slip Resistance					Size	Box Quantity
			Thickness	Wear Layer	Bevel	DIN 51130	EN 13893		
	LLP92	Country Oak	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP95	Ashland	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP99	Hudson	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP102	Heritage Oak	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP106	Antique Timber	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP108	Providence	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP109	Stamford	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP113	Cambridge	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP142	Sicilia	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP143	Sardinia	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP144	Tavolara	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP145	Torcello	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP146	Budelli	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP147	Lampione	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP148	Linosa	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP149	Palmaria	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP150	Levanzo	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP152	Waterbury	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP153	Brockton	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP156	Hamden	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP157	Bridgeport	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP161	Salina	4,5mm	0,55mm	No	R10	DS	1050,0mm x 250,0mm	12 planks / 3,150m ²
	LLP301	Twilight Oak	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²
	LLP304	Weathered Heart Pine	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²
	LLP305	Reclaimed Heart Pine	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²
	LLP306	Pearl Oak	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²
	LLP307	Neutral Oak	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²
	LLP308	French Grey Oak	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²
	LLP309	Taupe Oak	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²
	LLP310	Champagne Oak	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²
	LLP311	Bleached Tasmanian Oak	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²
	LLP317	Lemon Spotted Gum	4,5mm	0,55mm	No	R10	DS	1500,0mm x 250,0mm	8 planks / 3,000m ²

Wood products by range - Rigid core

Slip Resistance									
RUBENS	Code	Product Name	Thickness	Wear Layer	Bevel	DIN 51130	EN 13893	Size	Box Quantity
	SCB-KP94	Pale Limed Oak	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²
	SCB-KP95	Rose Washed Oak	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²
	SCB-KP96	Mid Limed Oak	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²
	SCB-KP97	Classic Limed Oak	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²
	SCB-KP99	Lime Washed Oak	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²
	SCB-KP104	Light Worn Oak	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²
	SCB-KP105	White Painted Oak	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²
	SCB-KP131	Grey Scandi Pine	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²
	SCB-KP132	Washed Scandi Pine	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²
	SCB-KP138	Grey Limed Oak	4,5mm	0,3mm	No	R10	DS	1220,0mm x 180,0mm	14 planks / 3,074m ²

VAN GOGH	Code	Product Name	Thickness	Wear Layer	Bevel	DIN 51130	EN 13893	Size	Box Quantity
	SM-VGW120T-RKP	Grey Brushed Oak	6,5mm	0,55mm	Micro	R10	DS	708,0mm x 177,0mm	24 planks / 3,008m ²
	SM-VGW121T-RKP	Warm Brushed Oak	6,5mm	0,55mm	Micro	R10	DS	708,0mm x 177,0mm	24 planks / 3,008m ²
	SM-VGW122T-RKP	Golden Brushed Oak	6,5mm	0,55mm	Micro	R10	DS	708,0mm x 177,0mm	24 planks / 3,008m ²
	SM-VGW126T-RKP	Neutral Brushed Oak	6,5mm	0,55mm	Micro	R10	DS	708,0mm x 177,0mm	24 planks / 3,008m ²
	SM-VGW8116-RKP	Canadian Urban Oak	6,5mm	0,55mm	Micro	R10	DS	708,0mm x 177,0mm	24 planks / 3,008m ²
	SM-VGW8239-RKP	Texas Grey Ash	6,5mm	0,55mm	Micro	R10	DS	708,0mm x 177,0mm	24 planks / 3,008m ²
	RKP8101	Baltic Washed Oak	6,5mm	0,55mm	Micro	R10	DS	1420,0 x 225,0mm	10 planks / 3,195m ²
	RKP8103	Warm Ash	6,5mm	0,55mm	Micro	R10	DS	1420,0 x 225,0mm	10 planks / 3,195m ²
	RKP8105	Texas White Ash	6,5mm	0,55mm	Micro	R10	DS	1420,0 x 225,0mm	10 planks / 3,195m ²
	RKP8107	Smoked Butternut	6,5mm	0,55mm	Micro	R10	DS	1420,0 x 225,0mm	10 planks / 3,195m ²
	RKP8111	Baltic Limed Oak	6,5mm	0,55mm	Micro	R10	DS	1420,0 x 225,0mm	10 planks / 3,195m ²
	RKP8116	Canadian Urban Oak	6,5mm	0,55mm	Micro	R10	DS	1420,0 x 225,0mm	10 planks / 3,195m ²
	RKP8117	Canadian Nude Oak	6,5mm	0,55mm	Micro	R10	DS	1420,0 x 225,0mm	10 planks / 3,195m ²
	VGW52T-SCB	Auckland Oak	5,5mm	0,55mm	Micro	R10	DS	1220,0mm x 180,0mm	10 planks / 2,196m ²
	VGW81T-SCB	Country Oak	5,5mm	0,55mm	Micro	R10	DS	1220,0mm x 180,0mm	10 planks / 2,196m ²
	VGW82T-SCB	Distressed Oak	5,5mm	0,55mm	Micro	R10	DS	1220,0mm x 180,0mm	10 planks / 2,196m ²
	VGW85T-SCB	French Oak	5,5mm	0,55mm	Micro	R10	DS	1220,0mm x 180,0mm	10 planks / 2,196m ²
	VGW86T-SCB	Classic Oak	5,5mm	0,55mm	Micro	R10	DS	1220,0mm x 180,0mm	10 planks / 2,196m ²
	VGW111T-SCB	Light Distressed Oak	5,5mm	0,55mm	Micro	R10	DS	1220,0mm x 180,0mm	10 planks / 2,196m ²
	VGW115T-SCB	Natural Prime Oak	5,5mm	0,55mm	Micro	R10	DS	1220,0mm x 180,0mm	10 planks / 2,196m ²
	VGW120T-RKP	Grey Brushed Oak	6,5mm	0,55mm	Micro	R10	DS	1420,0mm x 225,0mm	10 planks / 3,195m ²
	VGW121T-RKP	Warm Brushed Oak	6,5mm	0,55mm	Micro	R10	DS	1420,0mm x 225,0mm	10 planks / 3,195m ²
	VGW122T-RKP	Golden Brushed Oak	6,5mm	0,55mm	Micro	R10	DS	1420,0mm x 225,0mm	10 planks / 3,195m ²
	VGW126T-RKP	Neutral Brushed Oak	6,5mm	0,55mm	Micro	R10	DS	1420,0mm x 225,0mm	10 planks / 3,195m ²
	VGW139T-SCB	Light Country Oak	5,5mm	0,55mm	Micro	R10	DS	1220,0mm x 180,0mm	10 planks / 2,196m ²
	VGW8239-RKP	Texas Grey Ash	6,5mm	0,55mm	Micro	R10	DS	1420,0mm x 225,0mm	10 planks / 3,195m ²

Stone products by range - Gluedown

Slip Resistance									
RUBENS	Code	Product Name	Thickness	Wear Layer	Bevel	DIN 51130	EN 13893	Size	Box Quantity
	ST14	Cumbrian Stone	2mm	0,3mm	No	R10	DS	304,8mm x 457,2mm	24 tiles / 3,345m ²
	ST16	Grey Riven Slate	2mm	0,3mm	No	R10	DS	304,8mm x 457,2mm	24 tiles / 3,345m ²
	ST22	Smoked Concrete	2mm	0,3mm	No	R10	DS	304,8mm x 457,2mm	24 tiles / 3,345m ²
	ST26	Frosted Marble	2mm	0,3mm	No	R10	DS	304,8mm x 457,2mm	24 tiles / 3,345m ²

OPUS	Code	Product Name	Thickness	Wear Layer	Bevel	DIN 51130	EN 13893	Size	Box Quantity
	SP213	Urbus	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 609,6mm	12 tiles / 3,345m ²

VAN GOGH	Code	Product Name	Thickness	Wear Layer	Bevel	DIN 51130	EN 13893	Size	Box Quantity
	SM-VGT2413	Palazzo Marble	3mm	0,55mm	Micro	R10	DS	177,8mm x 711,2mm	26 planks / 3,288m ²
	VGT2413	Palazzo Marble	3mm	0,55mm	Micro	R10	DS	457,2mm x 609,6mm	12 tiles / 3,345m ²
	VGT2420	Milanese Slate	3mm	0,55mm	Micro	R10	DS	457,2mm x 609,6mm	12 tiles / 3,345m ²
	VGT2422	Roman Slate	3mm	0,55mm	Micro	R10	DS	457,2mm x 609,6mm	12 tiles / 3,345m ²
	VGT3019	Grigio Breccia Marble	3mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	VGT3021	Bianco Breccia Marble	3mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²

Stone products by range - Loose lay

Slip Resistance									
LOOSELAY	Code	Product Name	Thickness	Wear Layer	Bevel	DIN 51130	EN 13893	Size	Box Quantity
	LLT201	Colorado	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²
	LLT203	Madison	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²
	LLT208	Tino	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²
	LLT209	Capri	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²
	LLT210	Nisida	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²
	LLT211	Vulcano	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²
	LLT215	Alaska	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²
	LLT216	Utah	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²
	LLT217	Vermont	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²
	LLT219	Quebec	4,5mm	0,55mm	No	R10	DS	500,0mm x 610,0mm	10 tiles / 3,050m ²

Stone products by range - Rigid core

Slip Resistance									
RUBENS	Code	Product Name	Thickness	Wear Layer	Bevel	DIN 51130	EN 13893	Size	Box Quantity
	SCB-ST14-18	Cumbrian Stone	4,5mm	0,3mm	No	R10	DS	304,8mm x 457,2mm	20 tiles / 2,787m ²
	SCB-ST16-18	Grey Riven Slate	4,5mm	0,3mm	No	R10	DS	304,8mm x 457,2mm	20 tiles / 2,787m ²
	SCB-ST22-18	Smoked Concrete	4,5mm	0,3mm	No	R10	DS	304,8mm x 457,2mm	20 tiles / 2,787m ²
	SCB-ST26-18	Frosted Marble	4,5mm	0,3mm	No	R10	DS	304,8mm x 457,2mm	20 tiles / 2,787m ²

VAN GOGH	Code	Product Name	Thickness	Wear Layer	Bevel	DIN 51130	EN 13893	Size	Box Quantity
	SM-RKT2413-7	Palazzo Marble	6,5mm	0,55mm	Micro	R10	DS	177,0mm x 708,0mm	24 tiles / 3,008m ²
	RKT2413	Palazzo Marble	6,5mm	0,55mm	Micro	R10	DS	457,0mm x 600,0mm	10 tiles / 2,752m ²
	VGT2420-RKT	Milanese Slate	6,5mm	0,55mm	Micro	R10	DS	457,0mm x 600,0mm	10 tiles / 2,742m ²
	VGT2422-RKT	Roman Slate	6,5mm	0,55mm	Micro	R10	DS	457,0mm x 600,0mm	10 tiles / 2,742m ²
	VGT3019-RKT	Grigio Breccia Marble	6,5mm	0,55mm	Micro	R10	DS	457,0mm x 935,0mm	6 tiles / 2,564m ²
	VGT3021-RKT	Bianco Breccia Marble	6,5mm	0,55mm	Micro	R10	DS	457,0mm x 935,0mm	6 tiles / 2,564m ²

Abstract products by range - **Gluedown**

HERITAGE COLLECTION	Code	Product Name	Thickness	Wear Layer	Bevel	Products used	Size	Box Quantity
	CLIF-01	Clifton	2,5mm	0,5mm	Standard	SP115 V20 - - -	228,6mm x 228,6mm	32 pieces / 1,672m ²
	CLIF-02	Clifton	2,5mm	0,5mm	Standard	V19 V20 - - -	228,6mm x 228,6mm	32 pieces / 1,672m ²
	CLIF-03	Clifton	2,5mm	0,5mm	Standard	V17 V20 - - -	228,6mm x 228,6mm	32 pieces / 1,672m ²
	CLIF-04	Clifton	2,5mm	0,5mm	Standard	V12 V19 V20 SP115 -	228,6mm x 228,6mm	32 pieces / 1,672m ²
	LANS-01	Lansdown	2,5mm	0,5mm	Standard	V20 SP115 - - -	228,6mm x 228,6mm	16 pieces / 1,486m ²
	LANS-02	Lansdown	2,5mm	0,5mm	Standard	V20 V19 - - -	228,6mm x 228,6mm	16 pieces / 1,486m ²
	LANS-03	Lansdown	2,5mm	0,5mm	Standard	V20 SP115 V12 - -	228,6mm x 228,6mm	16 pieces / 1,486m ²
	LANS-04	Lansdown	2,5mm	0,5mm	Standard	V20 SP115 V13 - -	228,6mm x 228,6mm	16 pieces / 1,486m ²
	MAYF-01	Mayfair	2,5mm	0,5mm	Standard	V18 V12 V19 V20 SP115	304,8mm x 304,8mm	16 pieces / 1,486m ²
	MAYF-02	Mayfair	2,5mm	0,5mm	Standard	V15 V16 V12 V20 SP115	304,8mm x 304,8mm	16 pieces / 1,486m ²
	MONT-01	Montpellier	2,5mm	0,5mm	Standard	V20 SP115 - - -	152,4mm x 152,4mm & 53,8mm x 53,8mm	50 tiles & 50 key squares / 1,161m ²
	MONT-02	Montpellier	2,5mm	0,5mm	Standard	SP115 V20 - - -	152,4mm x 152,4mm & 53,8mm x 53,8mm	50 tiles & 50 key squares / 1,161m ²
	MONT-03	Montpellier	2,5mm	0,5mm	Standard	V19 V20 - - -	152,4mm x 152,4mm & 53,8mm x 53,8mm	50 tiles & 50 key squares / 1,161m ²
	MONT-04	Montpellier	2,5mm	0,5mm	Standard	V17 V20 - - -	152,4mm x 152,4mm & 53,8mm x 53,8mm	50 tiles & 50 key squares / 1,161m ²
	MONT-05	Montpellier	2,5mm	0,5mm	Standard	V14 V20 - - -	152,4mm x 152,4mm & 53,8mm x 53,8mm	50 tiles & 50 key squares / 1,161m ²
	MONT-06	Montpellier	2,5mm	0,5mm	Standard	V12 V20 - - -	152,4mm x 152,4mm & 53,8mm x 53,8mm	50 tiles & 50 key squares / 1,161m ²
	MONT-07	Montpellier	2,5mm	0,5mm	Standard	V19 SP115 V20 - -	152,4mm x 152,4mm & 53,8mm x 53,8mm	50 tiles & 50 key squares / 1,161m ²
	MONT-08	Montpellier	2,5mm	0,5mm	Standard	V18 SP115 V20 - -	152,4mm x 152,4mm & 53,8mm x 53,8mm	50 tiles & 50 key squares / 1,161m ²

See individual products pages for technical information.

KALEIDOSCOPE	Code	Product Name	Thickness	Wear Layer	Bevel	Products used	Size	Box Quantity
	KAL01	Pyramid	3,0mm	0,55mm	No	VGW80T VGW83T VGW89T -	150,0 mm face	72 pieces / 2,810m ²
	KAL02	Cubix	2,0mm	0,3mm	No	ST8 ST13 ST14 -	150,0 mm face	150 pieces / 2,920m ²
	KAL03	Cubix	3,0mm	0,7mm	No	LM06 LM12 LM16 -	150,0 mm face	126 pieces / 2,460m ²
	KAL04	Pennon	3,0mm	0,7mm	No	LM09 LM12 LM16 -	150,0 mm face	36 pieces / 2,100m ²
	KAL05	Half Pennon	3,0mm	0,55mm	No	VGW80T VGW83T - -	150,0 mm face	72 pieces / 2,100m ²
	KAL06	Apex	2,5mm	0,55mm	No	WP418 - - -	150,0 mm face	36 pieces / 2,800m ²
	KAL07	Apex	2,0mm	0,3mm	No	KP95 - - -	150,0 mm face	36 pieces / 2,800m ²
	KAL08	Hexa	3,0mm	0,7mm	No	LM12 - - -	150,0 mm face	36 pieces / 2,100m ²
	KAL09	Hexa	2,0mm	0,3mm	No	ST8 ST13 - -	150,0 mm face	36 pieces / 2,100m ²
	KAL10	Tripoint	2,0mm	0,3mm	No	KP103 KP104 KP105 -	150,0 mm face	72 pieces / 2,970m ²
	KAL11	Woven	2,0mm	0,3mm	No	SP111 SP211 SP213 -	150,0 mm face	32 pieces / 2,100m
	KAL12	Woven	2,0mm	0,3mm	No	WP311 WP318 - -	150,0 mm face	32 pieces / 2,100m
	KAL13	Cubix	2,0mm	0,3mm	No	KP97 KP103 KP105 -	150,0 mm face	150 pieces / 2,920m ²
	KAL14	Apex	3,0mm	0,7mm	No	RP97 RP98 RP99 -	150,0 mm face	36 pieces / 2,800m ²

See individual products pages for technical information.

Abstract products by range - **Gluedown**

OPUS	Code	Product Name	Thickness	Wear Layer	Bevel	DIN 51130	EN 13893	Size	Box Quantity
	SP119	Dolce	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 457,2mm	16 tiles / 3,345m ²
	SP120	Pieta	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 457,2mm	16 tiles / 3,345m ²
	SP121	Datmata	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 457,2mm	16 tiles / 3,345m ²
	SP122	Salute Bianco	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 457,2mm	16 tiles / 3,345m ²
	SP719	Burnt Sienna	2,5mm	0,55mm	Micro	R10	DS	152,4mm x 914,4mm	24 planks / 3,345m ²
	SP720	Indigo	2,5mm	0,55mm	Micro	R10	DS	152,4mm x 914,4mm	24 planks / 3,345m ²
	SP721	Amber	2,5mm	0,55mm	Micro	R10	DS	152,4mm x 914,4mm	24 tiles / 3,345m ²
	SP722	Zinc	2,5mm	0,55mm	Micro	R10	DS	152,4mm x 914,4mm	24 planks / 3,345m ²
	SP723	Zinc	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP724	Chalk Grey	2,5mm	0,55mm	Micro	R10	DS	152,4mm x 914,4mm	24 tiles / 3,345m ²
	SP725	Chalk Grey	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP726	Yellow Ochre	2,5mm	0,55mm	Micro	R10	DS	152,4mm x 914,4mm	24 tiles / 3,345m ²
	SP727	Black Iron	2,5mm	0,55mm	Micro	R10	DS	152,4mm x 914,4mm	24 tiles / 3,345m ²
	SP728	Black Iron	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP729	San Marco	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP730	Leoncini	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP731	Stratus	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP732	Umbra	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP734	Contarini	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP735	Tizina	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP736	Interseco	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP737	Statera	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP738	Industria	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²
	SP739	Concreto	2,5mm	0,55mm	Micro	R10	DS	457,2mm x 914,4mm	8 tiles / 3,345m ²

Solid colours - **Gluedown**

SOLID COLOURS	Code	Product Name	Thickness	Wear Layer	Bevel	Slip Resistance		Size	Box Quantity
						DIN 51130	EN 13893		
	V11	Baby Blue	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke
	V12	Azure	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke
	V13	Laurel	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke
	V14	Blush	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke
	V15	Gold	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke
	V16	Crimson	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke
	V17	Taupe	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke
	V18	Terracotta	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke
	V19	Dove Grey	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke
	V20	Lace	2,5mm	0,55mm	No	R10	DS	Bespoke	Bespoke

